


INSTALLATION INSTRUCTION

ROOF PLATFORM FITS FOR LC150

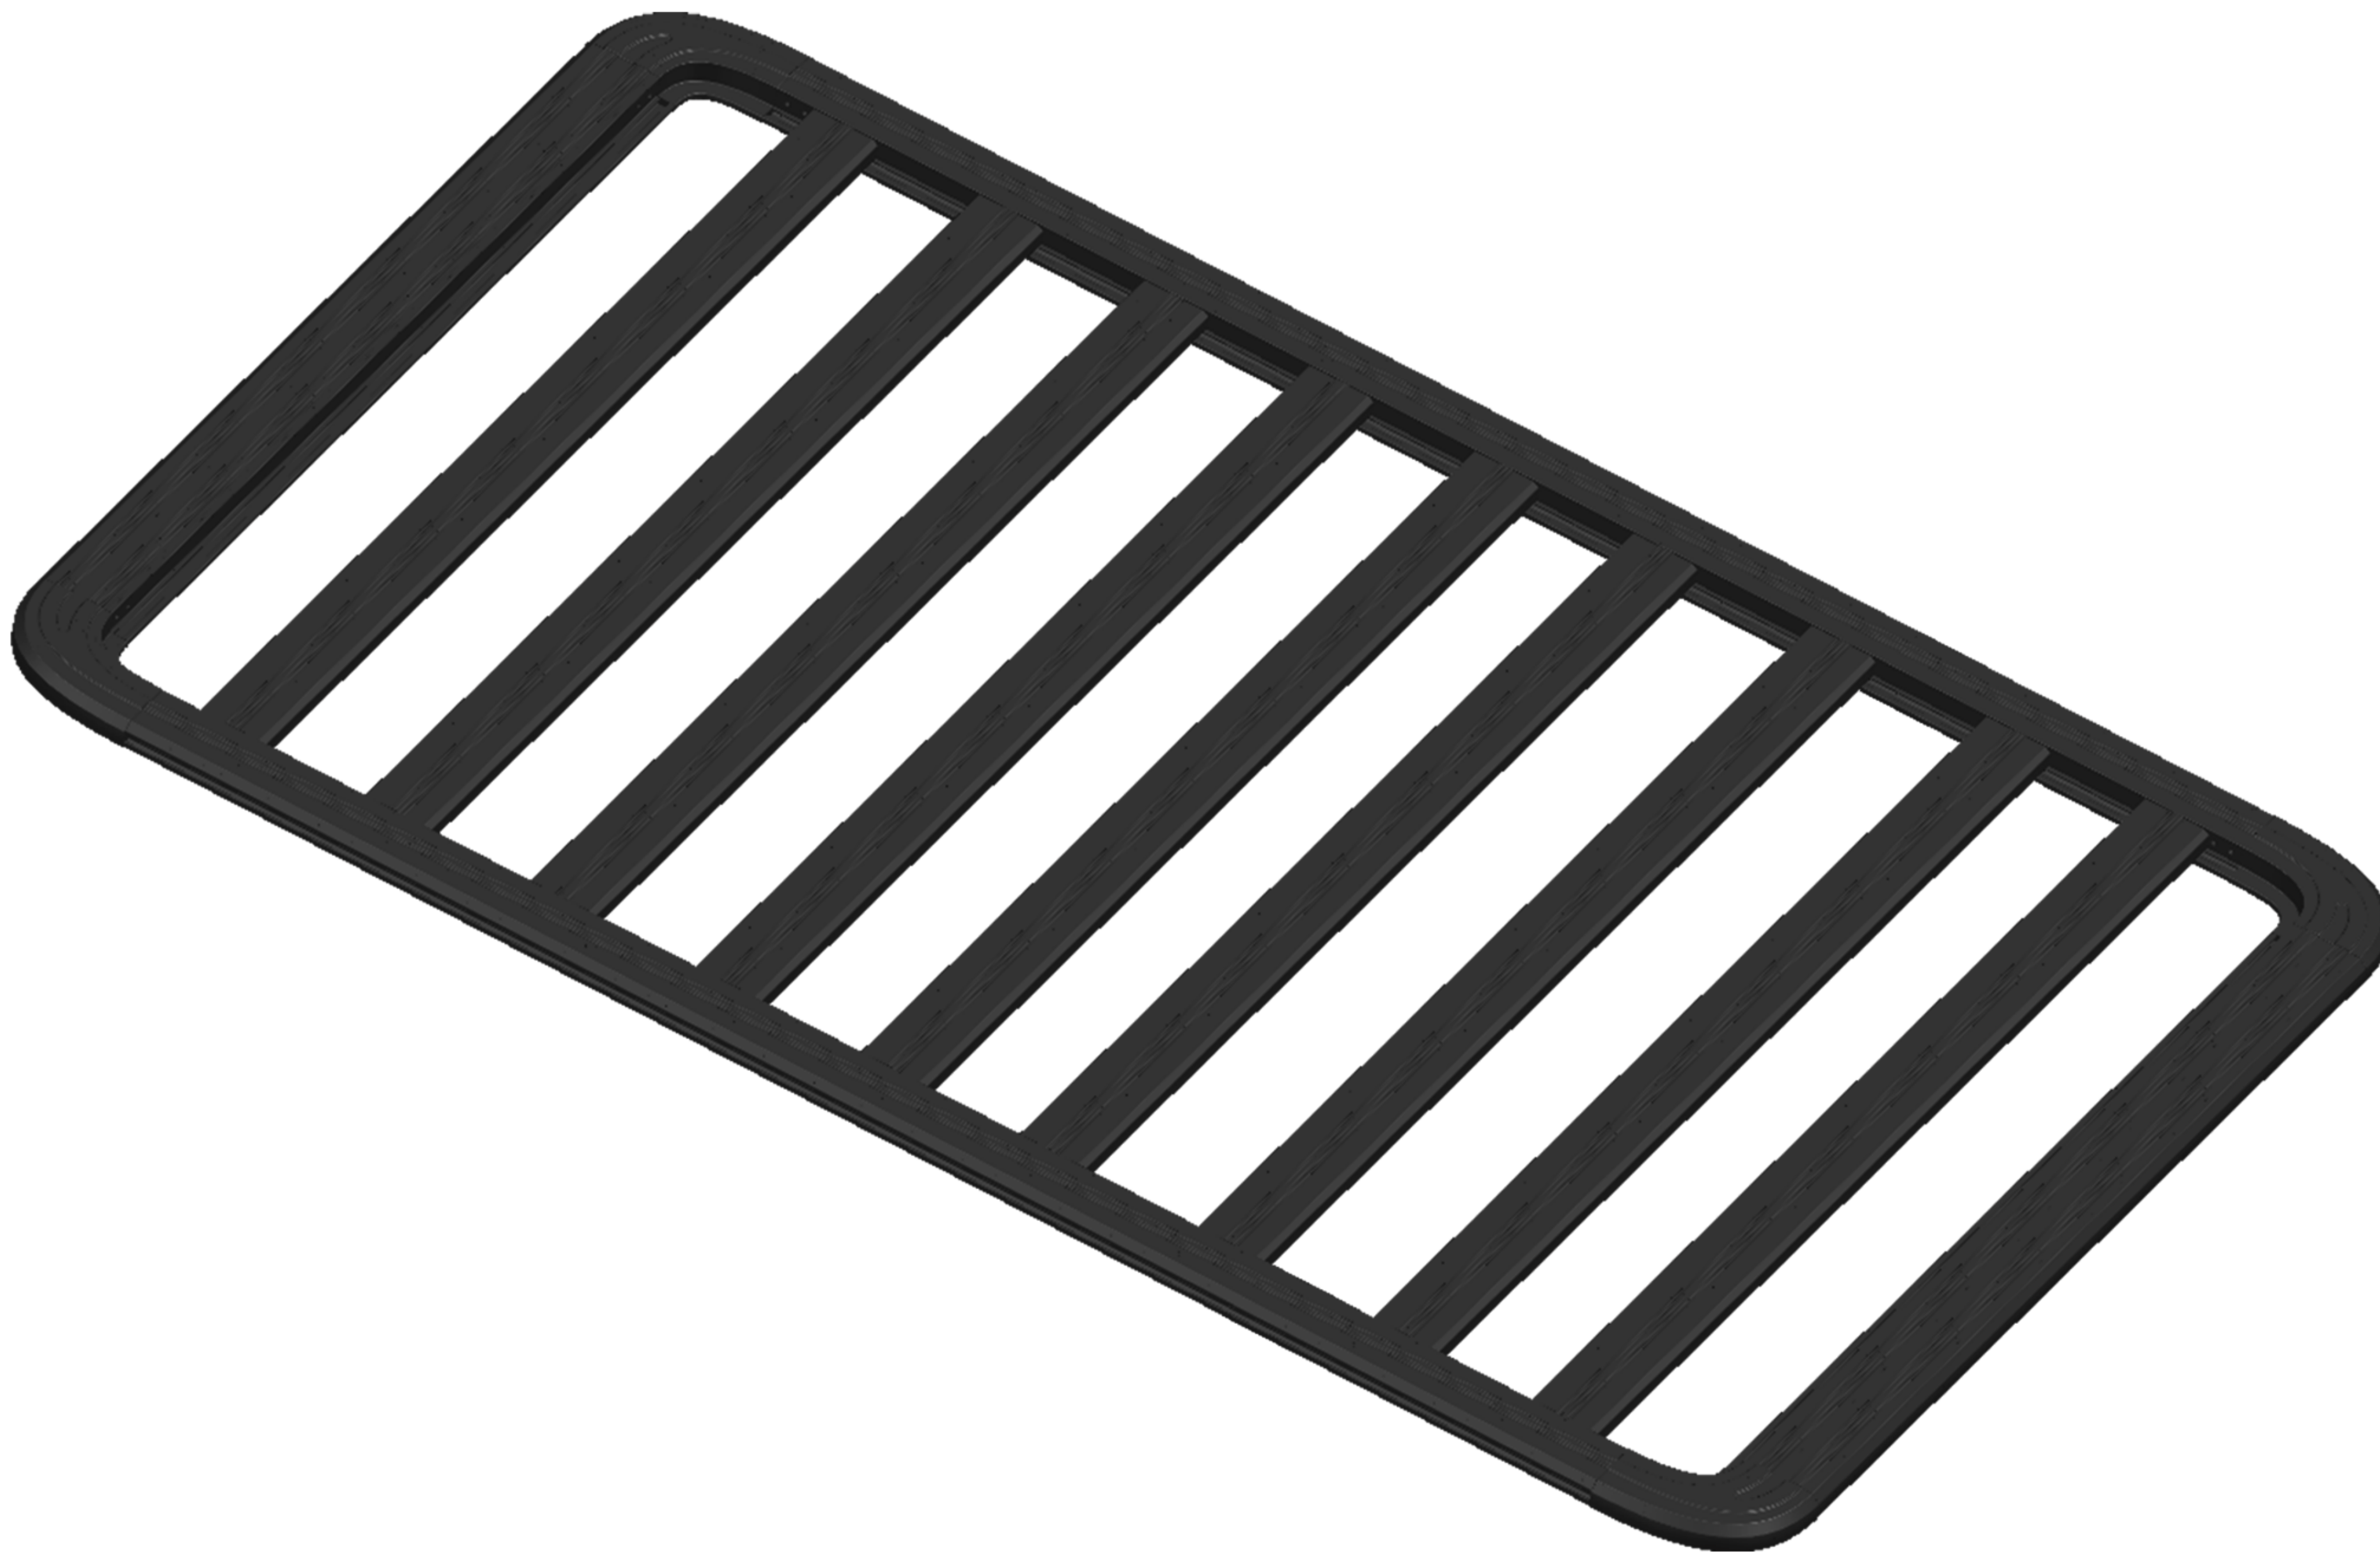

INFORMATION

The information in these installation instructions is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely install equipment in your vehicle. These procedures should not be attempted by individuals without professional expertise or by "do-it-yourselfers."

WARNING ⚠

It is critical that all products are properly and securely assembled and attached to your vehicle. Improper attachment could result in an automobile accident, causing serious bodily injury or death. You are responsible for assembling and securing all components to your vehicle, checking the attachments prior to use, and periodically inspecting the products for adjustment, wear, and damage. Therefore, you must read and understand all instructions and precautions supplied with your product prior to installation or use. If you do not understand all instructions and cautions, or if you lack mechanical experience and are not thoroughly familiar with the installation procedures, you should have the product installed by a professional installer or other qualified personnel.

NOTE: We will not be responsible for any damage caused by the failure to install the product according to these instructions. If you have any questions about the installation of this product, please contact us for assistance.

1 GET ORGANIZED

Depending on which size yh20 platform you order, quantities may vary from those pictured.

Here is what you are looking at for:

PARTS LIST		
1	x 2	Front & rear side beam
2	x 2	Side beam
3	x 9	Middle bottom plate
4	x 4	Corner L&R
5	x 16	M6x14 torx screw
6	x 18	Ship type nut
7	x 18	6x14 washer
8	x 18	M6x10 torx screw
9	x 15	Rubber
10	x 6	M8 triangular ring nut
11	x 6	8x16 washer
12	x 6	M8x30 T-shaped screw


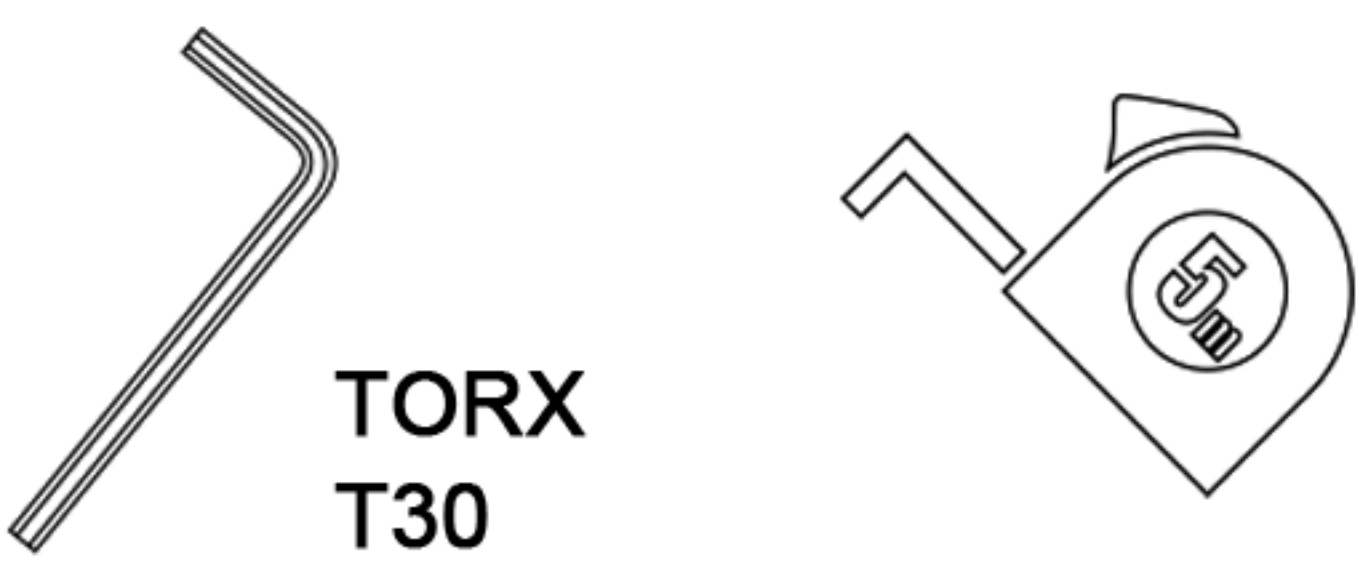
PARTS LIST		
13	x 4	M6x14 torx screw
TOOLS LIST		
		

FIGURE 1.1

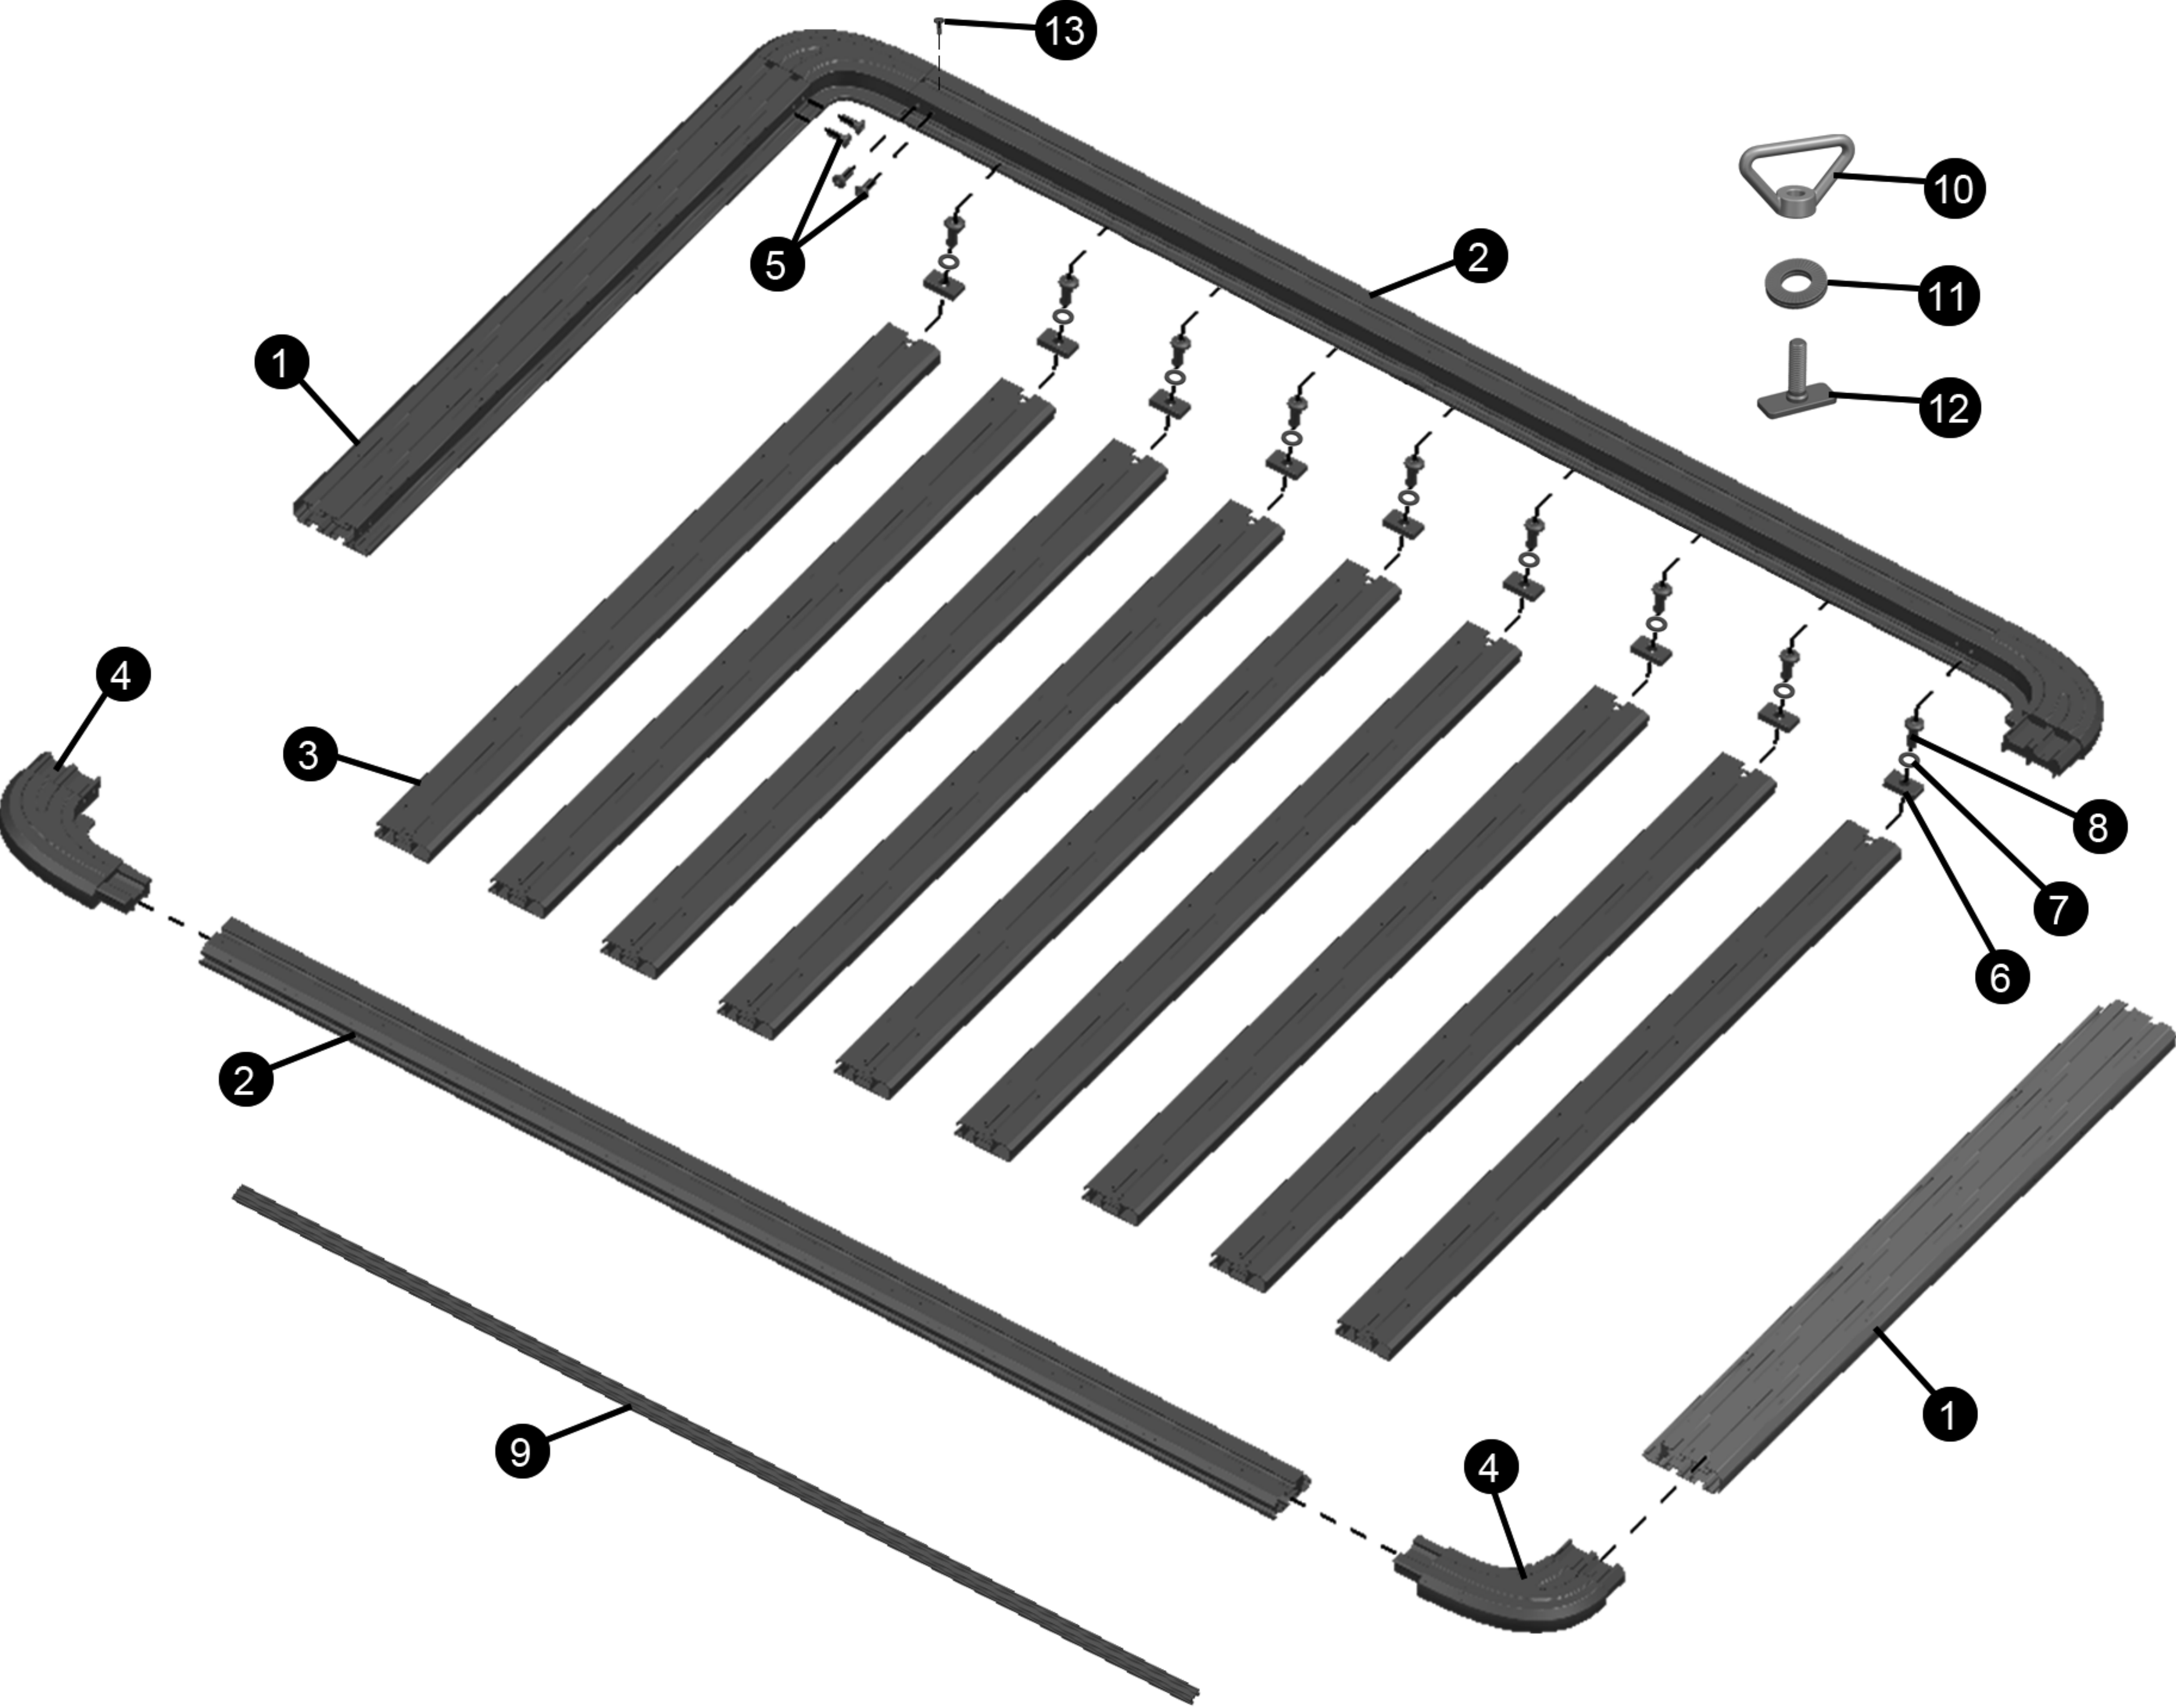


1

RACK ASSEMBLY


you have received four lengths of Side Profile,
you will need to join the pieces together using the Joiners

FIGURE
2.1

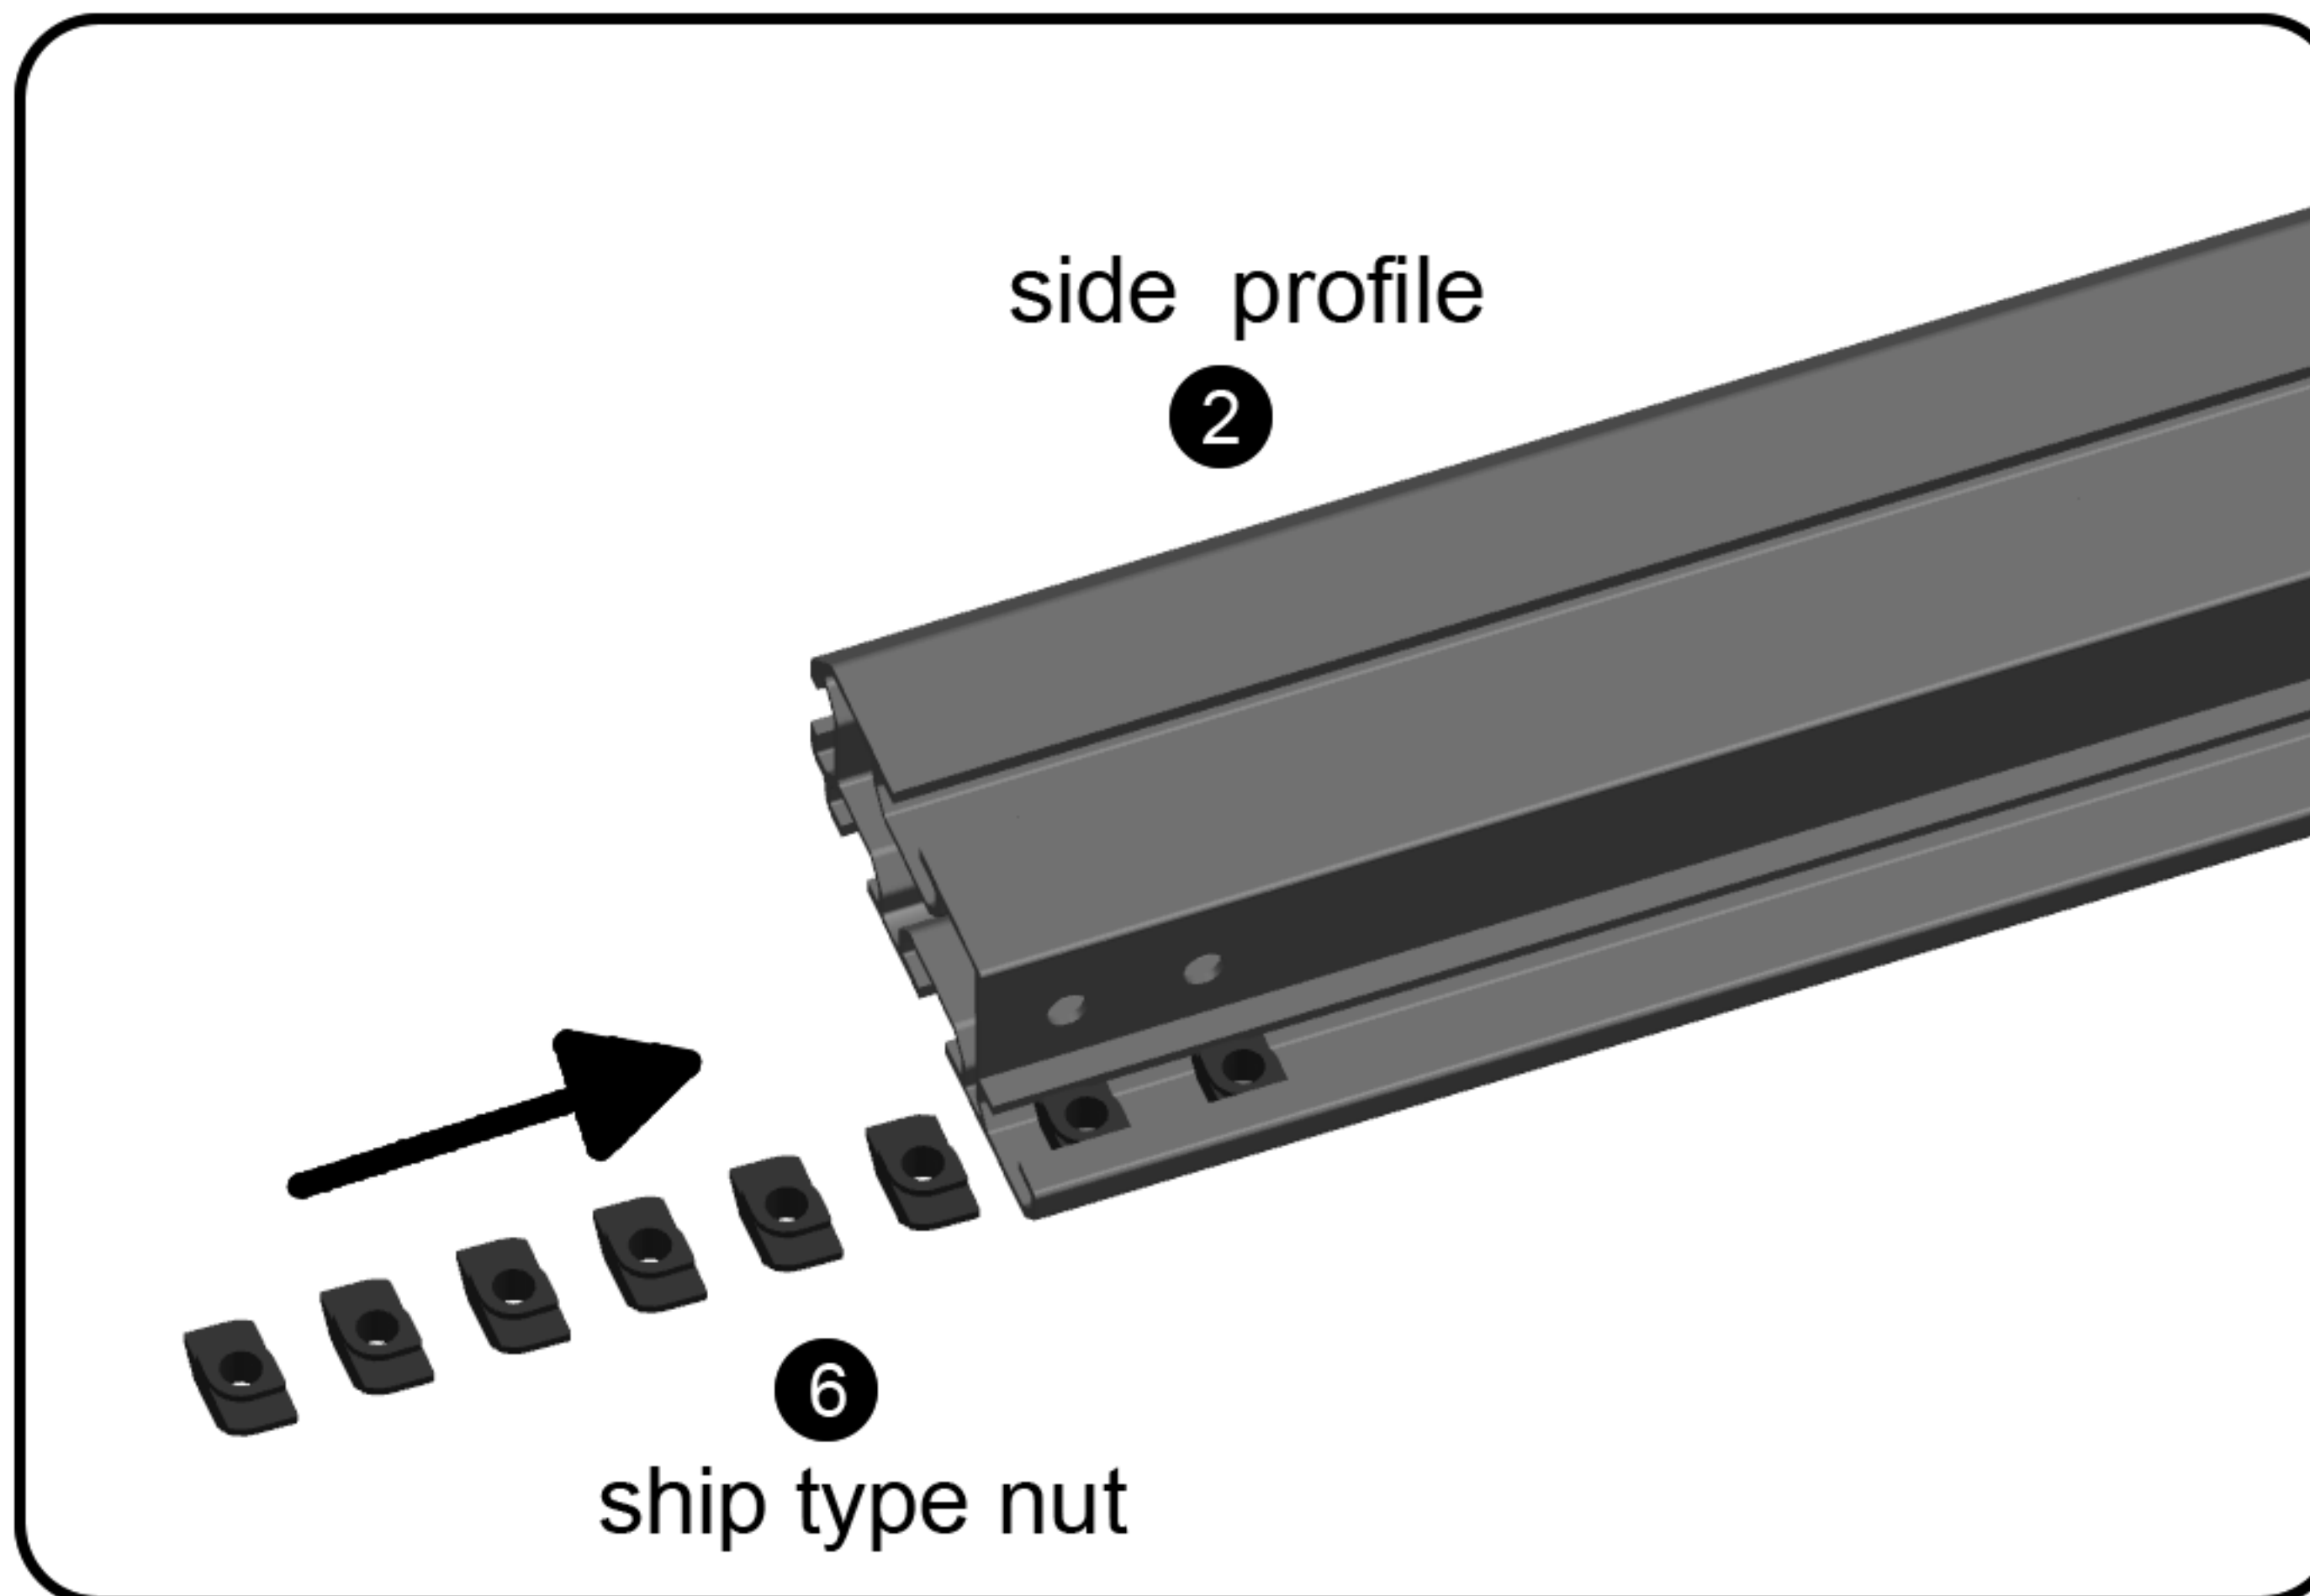


Match the number of standard flat , and then insert the ship type nuts with the same number as the standard Flat into the chute of the side profile.

FIGURE
2.2

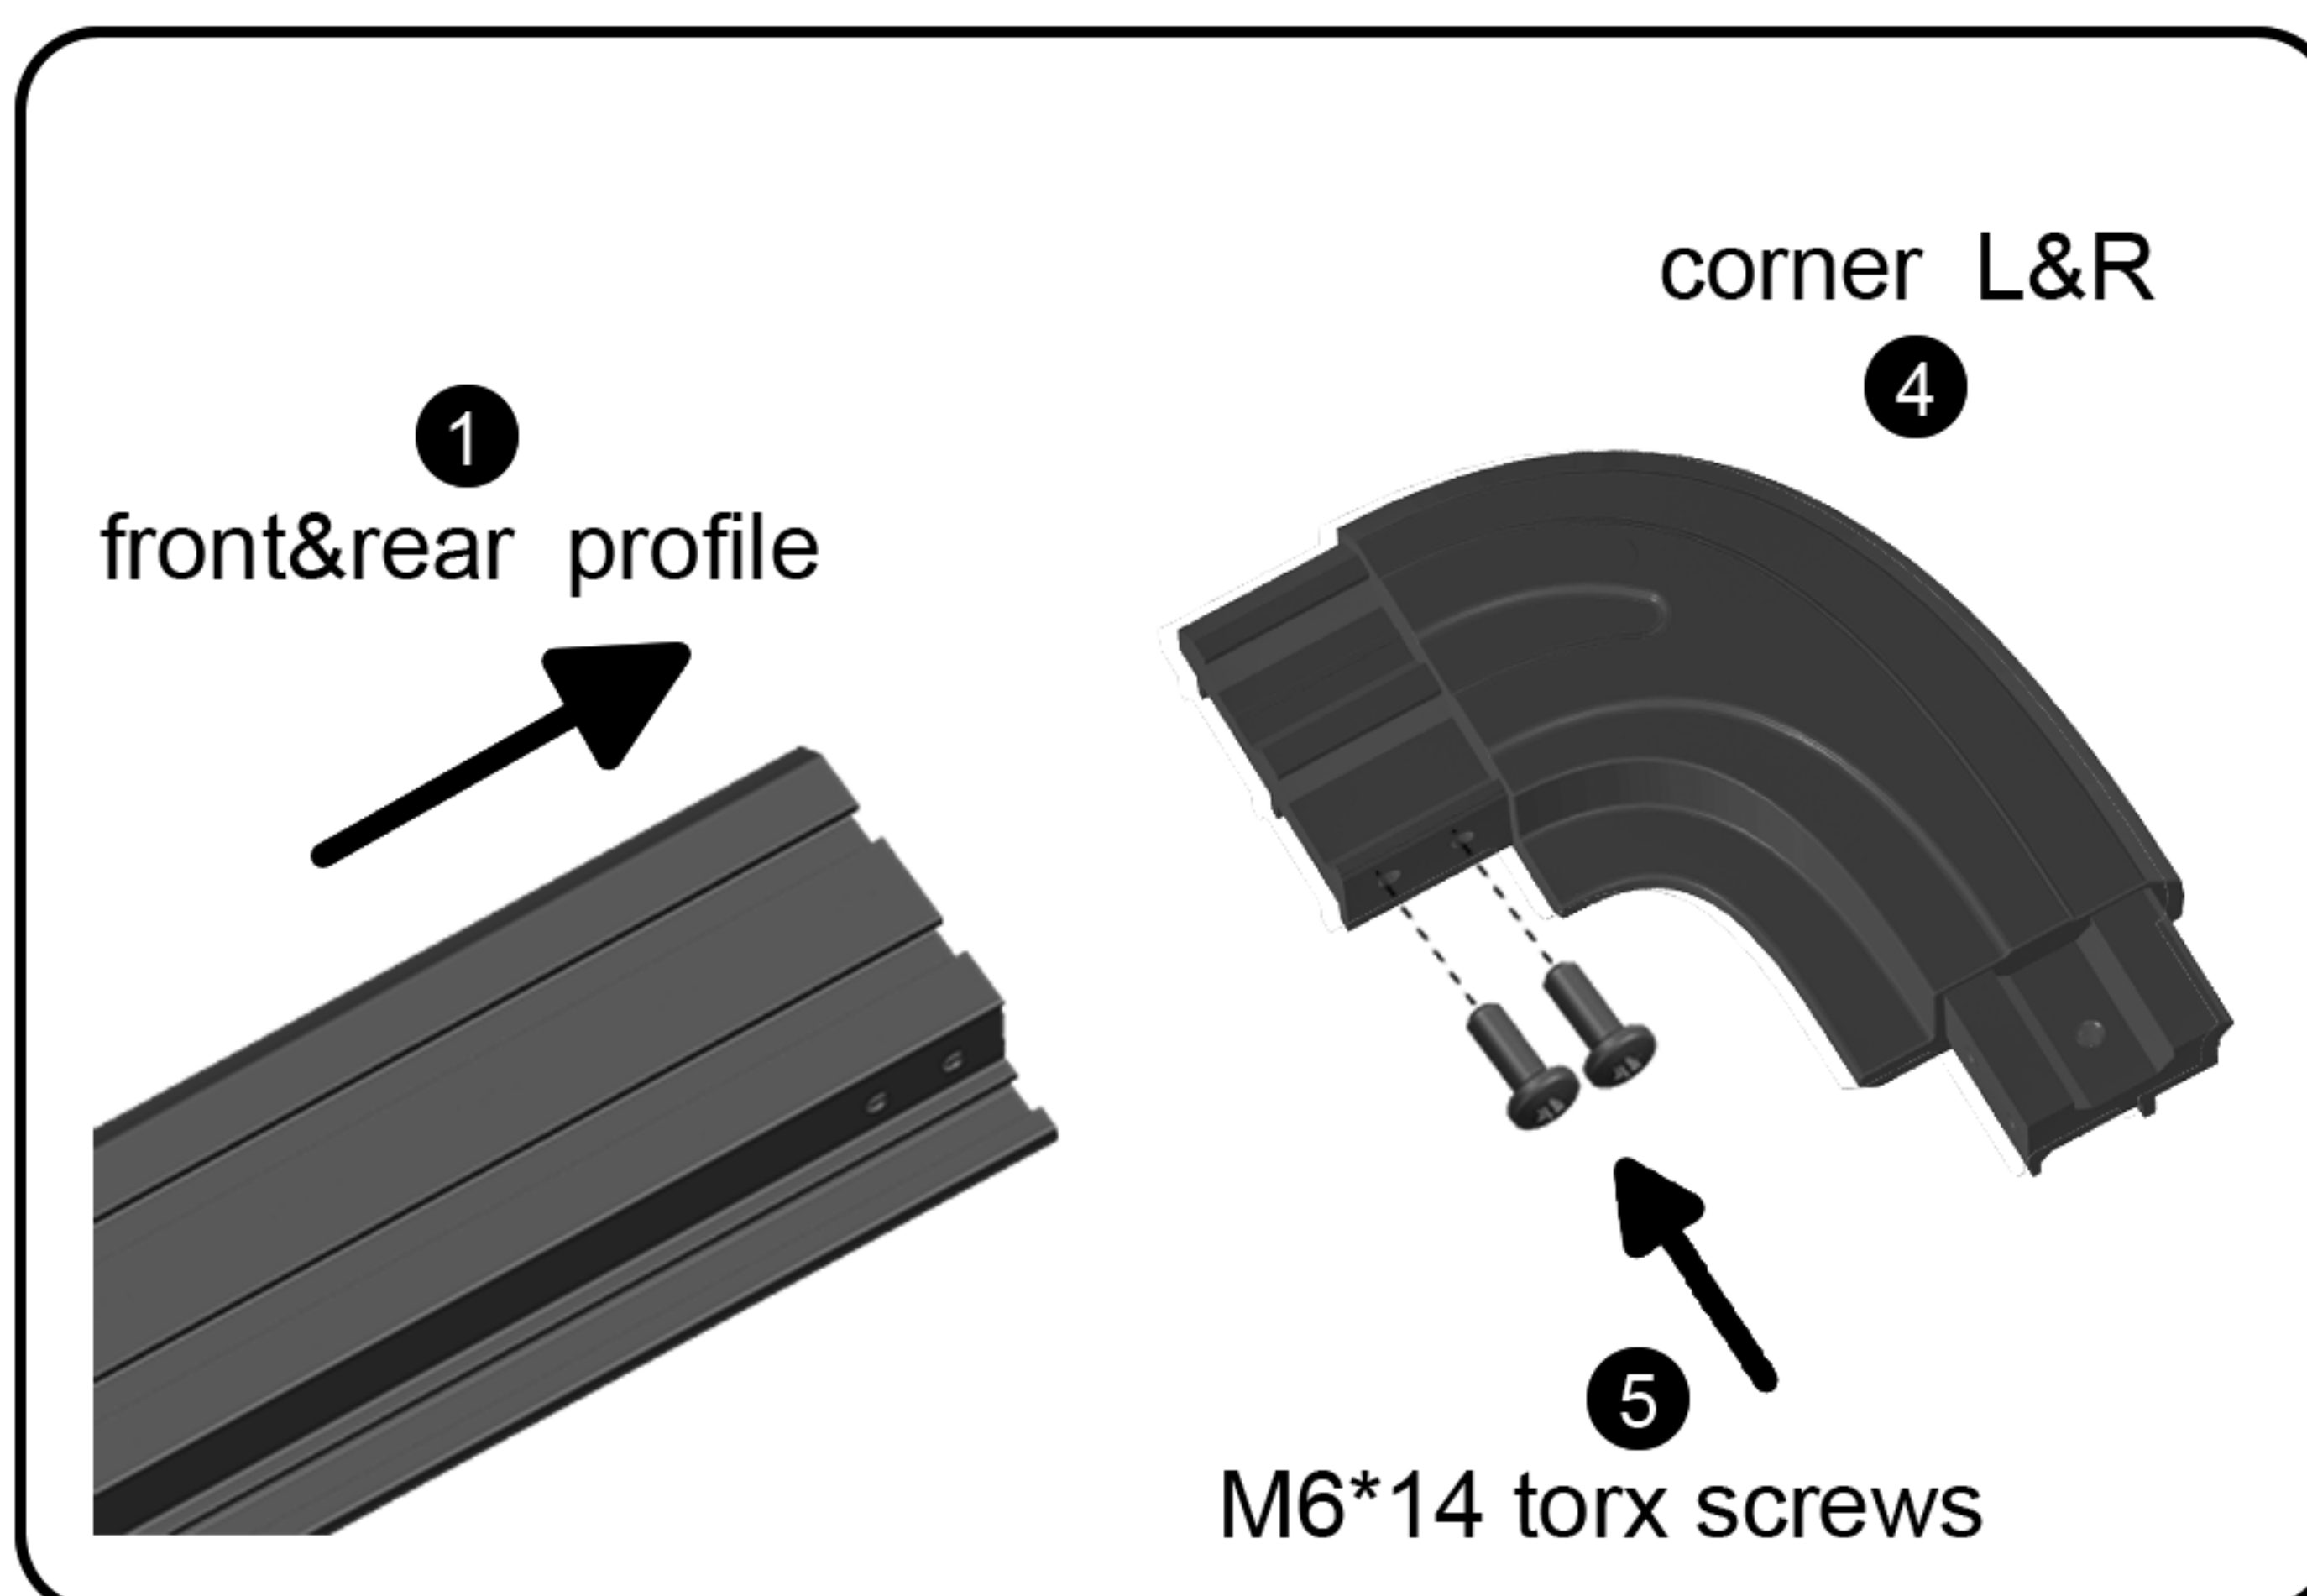


Insert the corner into the front&rear profiles and screw in the Torx screws.

FIGURE
2.3

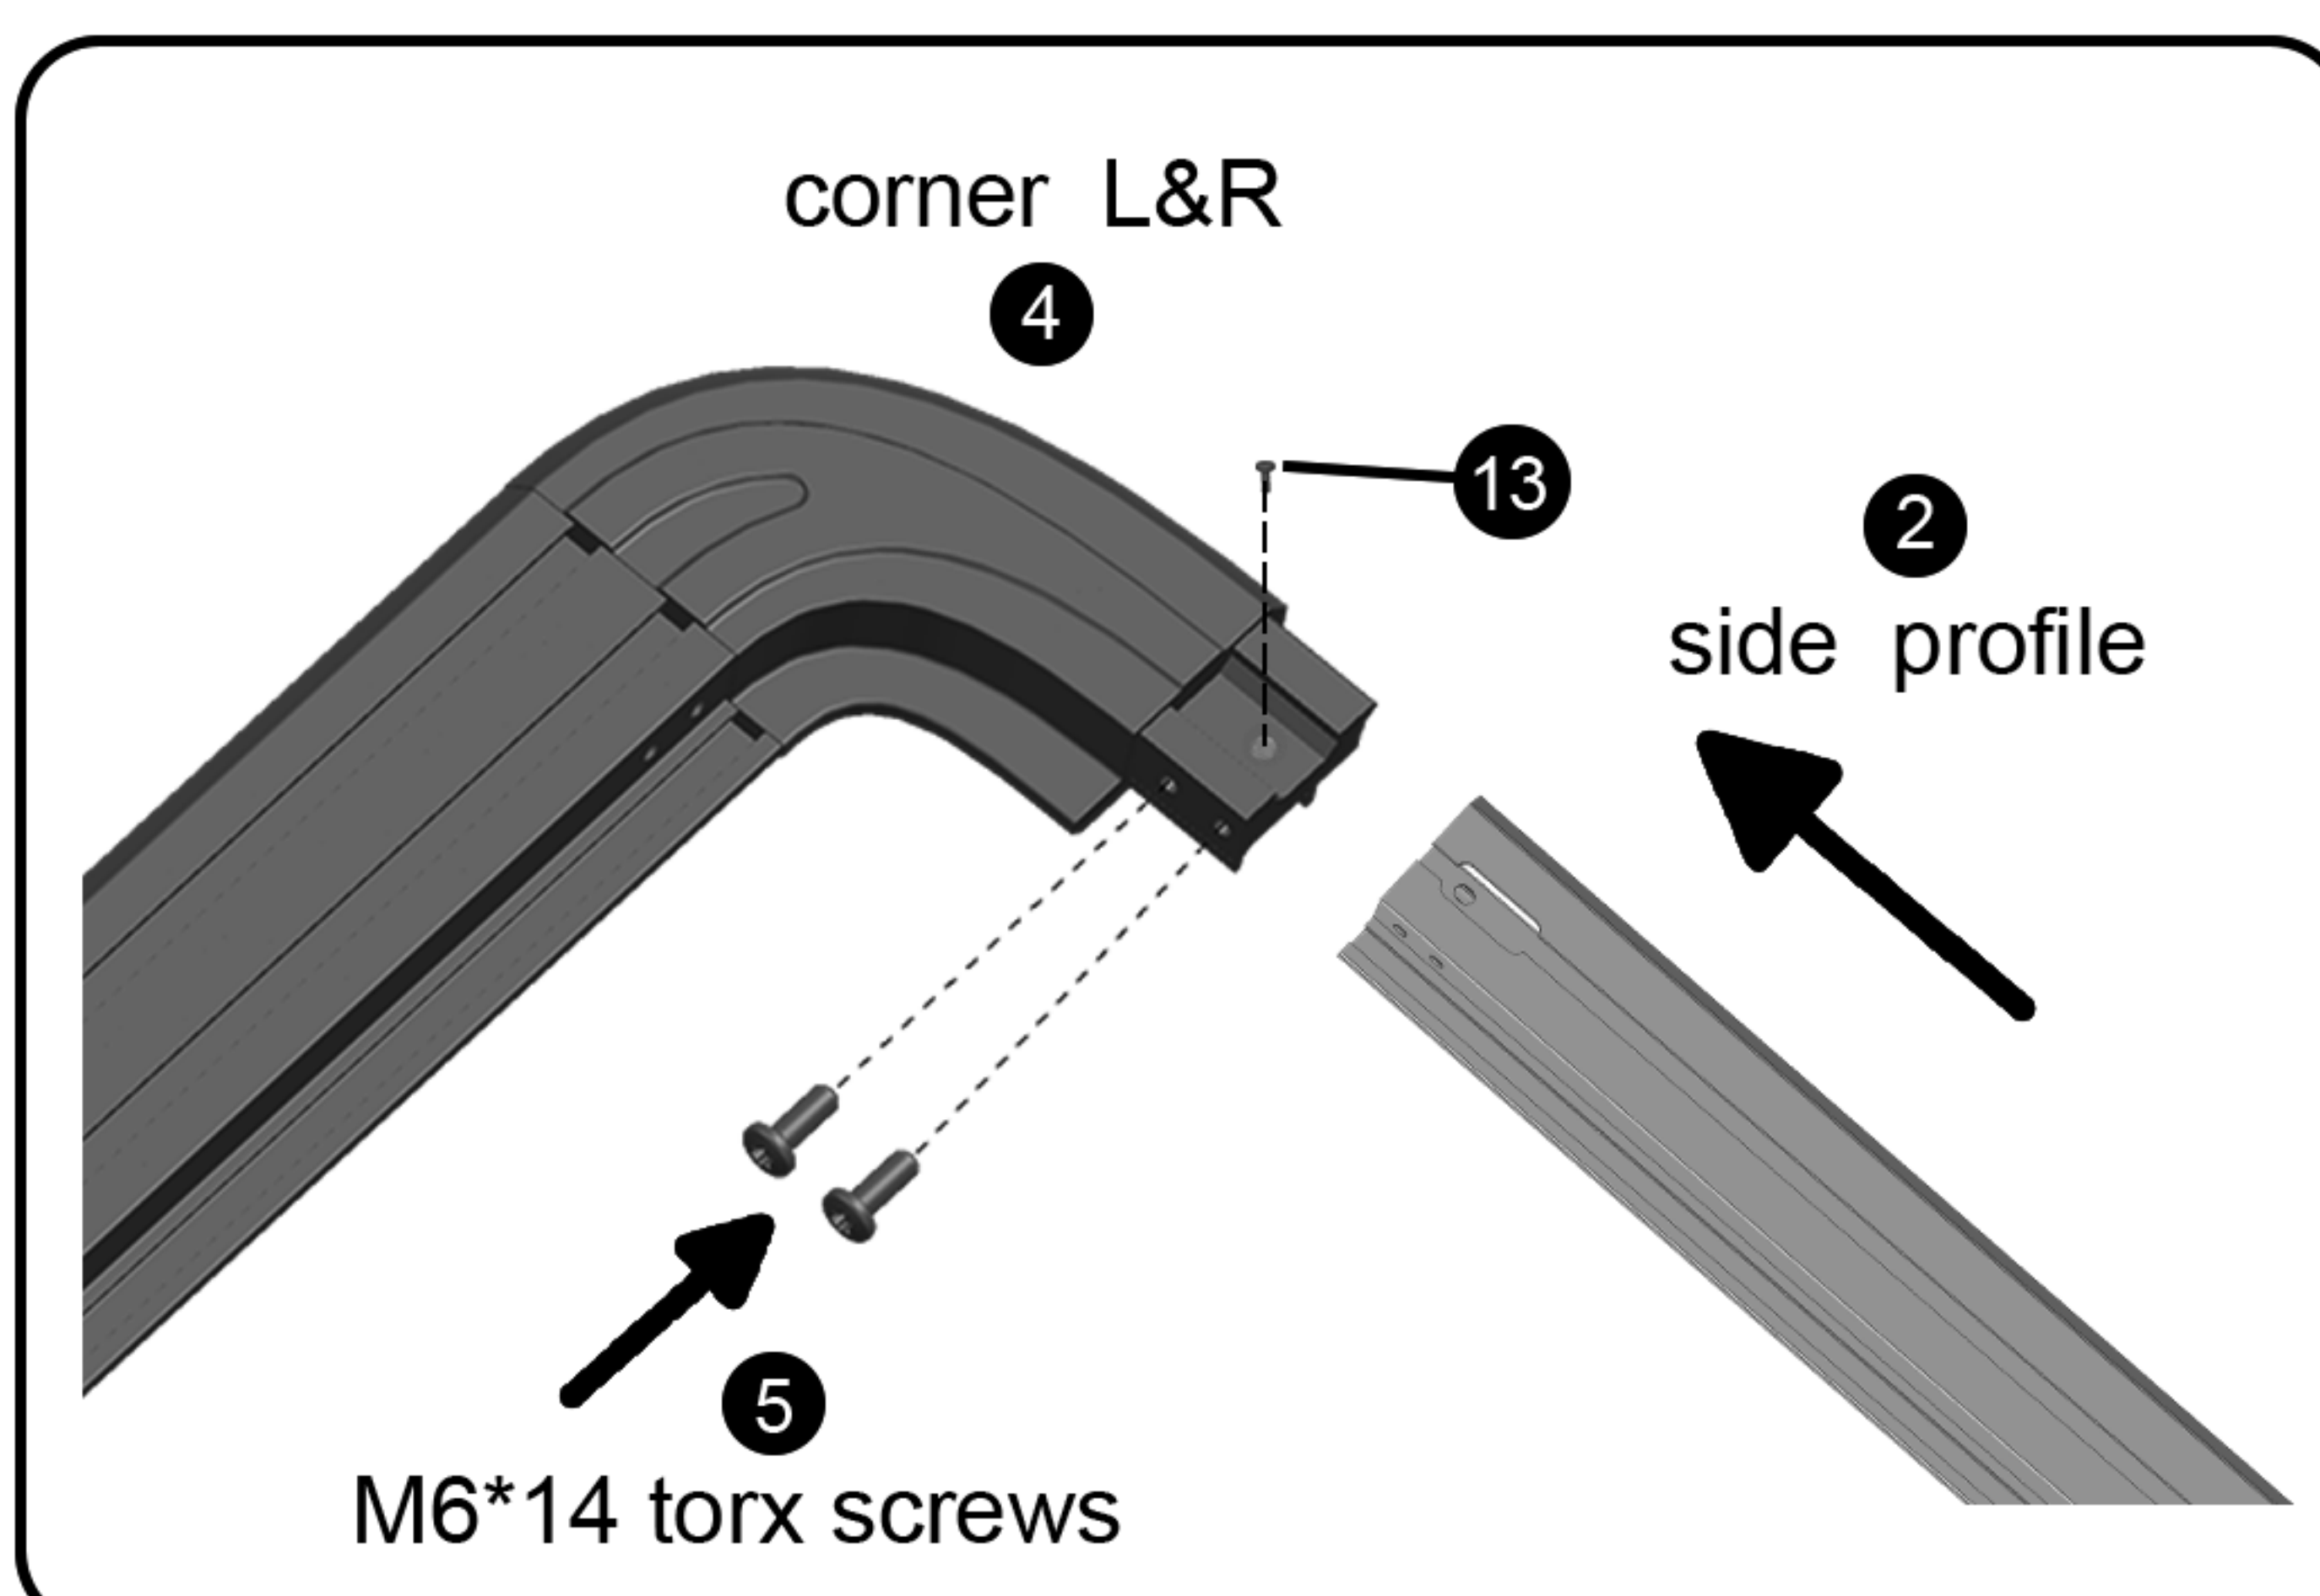


Insert the corner into the side profiles and screw in the Torx screws.

FIGURE 3.1

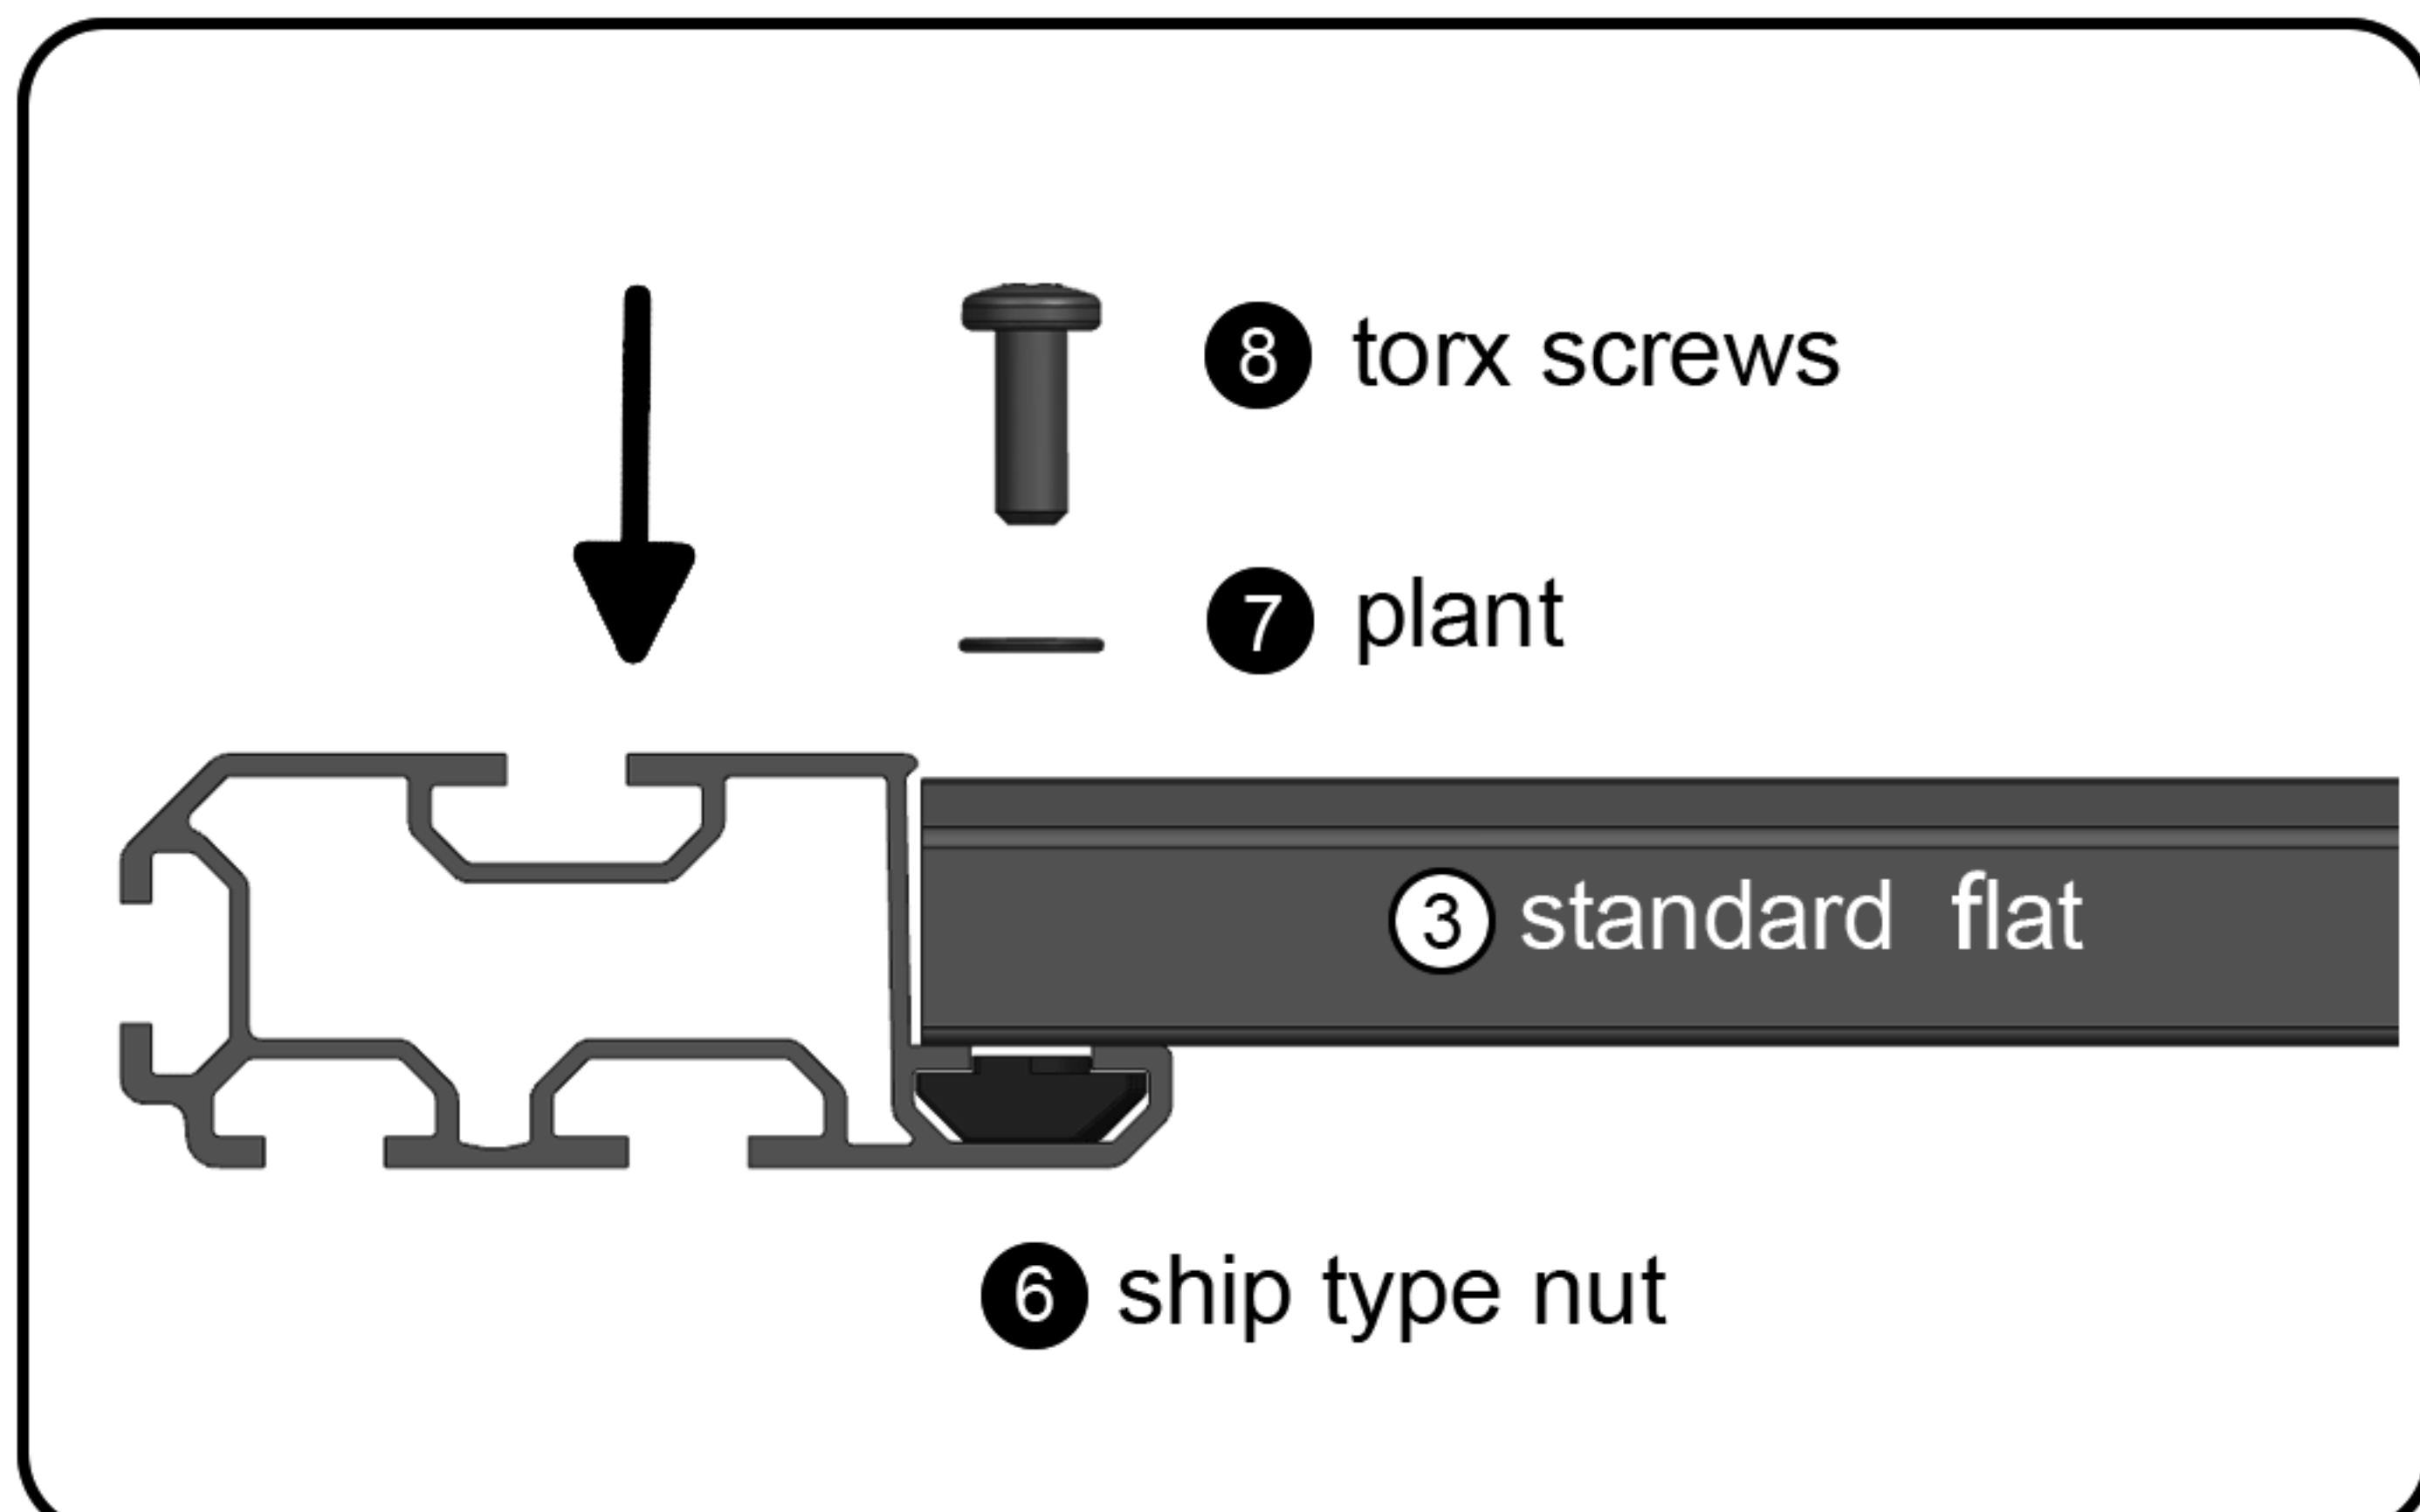



Place the standard flat on the side profile, and use screws and ship type nuts to lock the standard flat on the side profile.

FIGURE 3.2

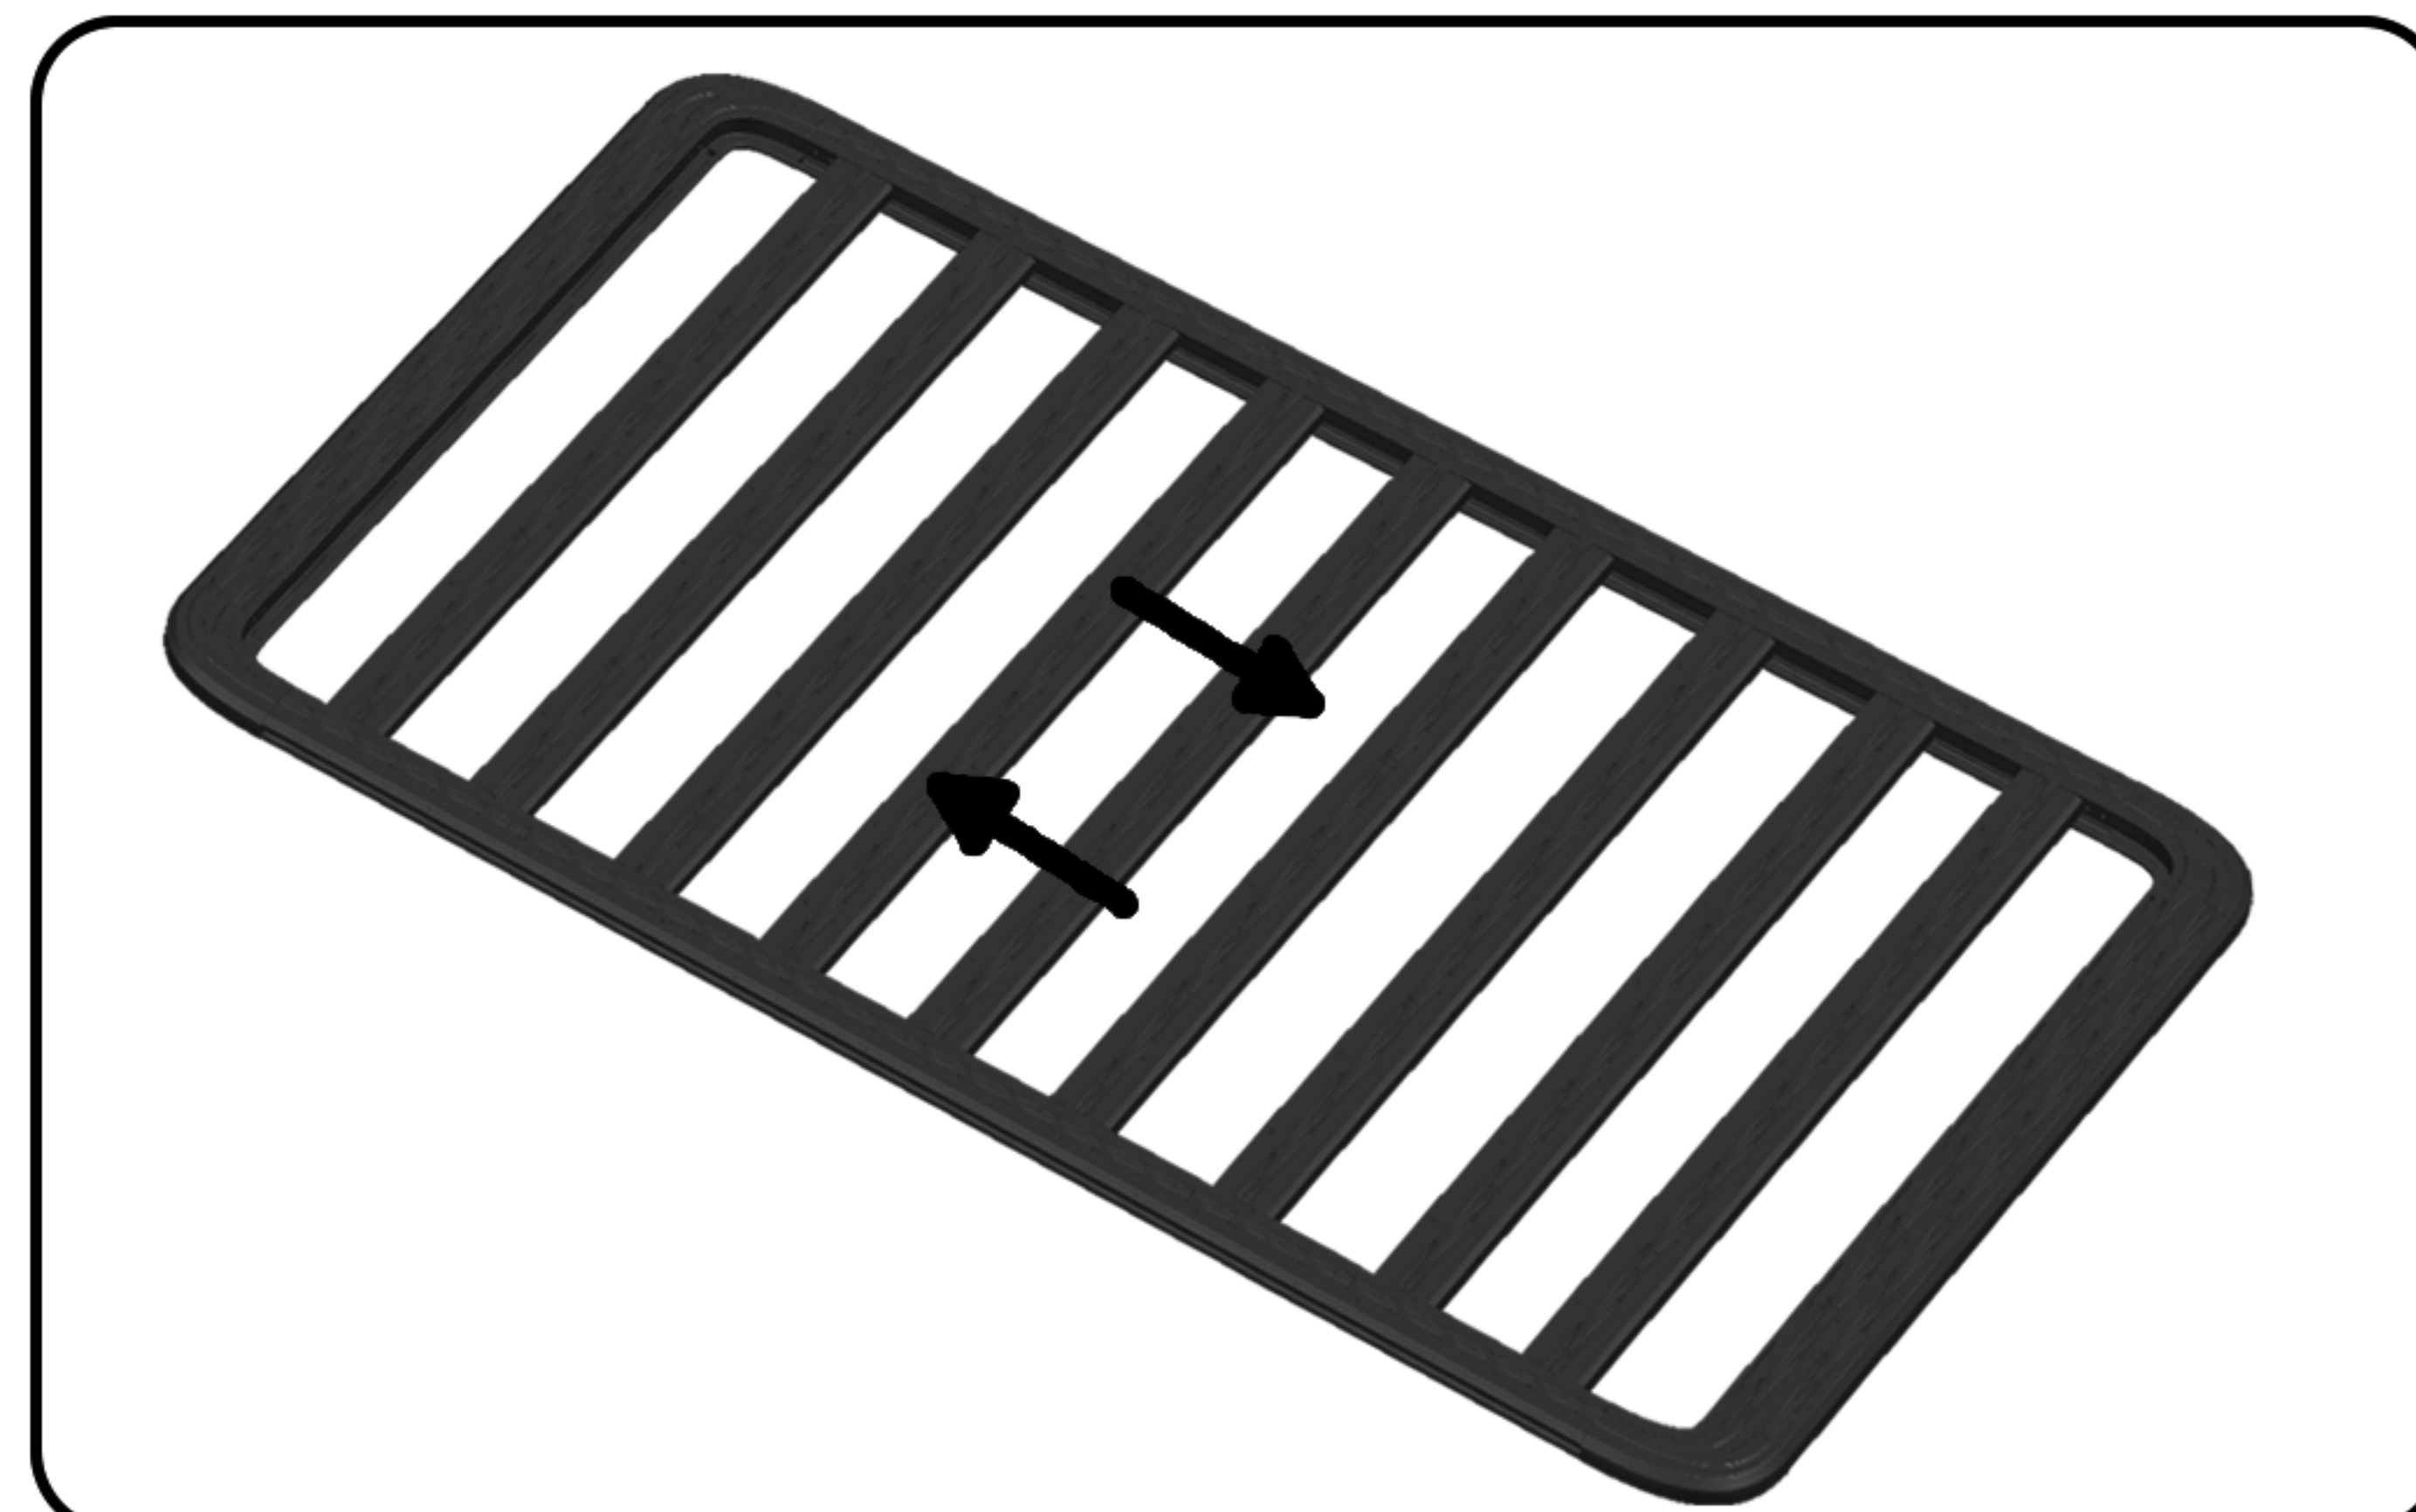

Adjust the position of the standard flat according to the use demand

- Now that your YH20 roof platform Tray is assembled, get your RackKit Installation Guide out and follow the instructions to fit the platform to your specific vehicle.
- The maximum load that can be placed on the roof luggage frame is 175 kg.
- The vehicle speed shall not exceed 130 km/h when the roof luggage frame is installed.
- But in order to maintain full functionality of the rack slots and any moving parts, you may want to give your gear a bath now and again

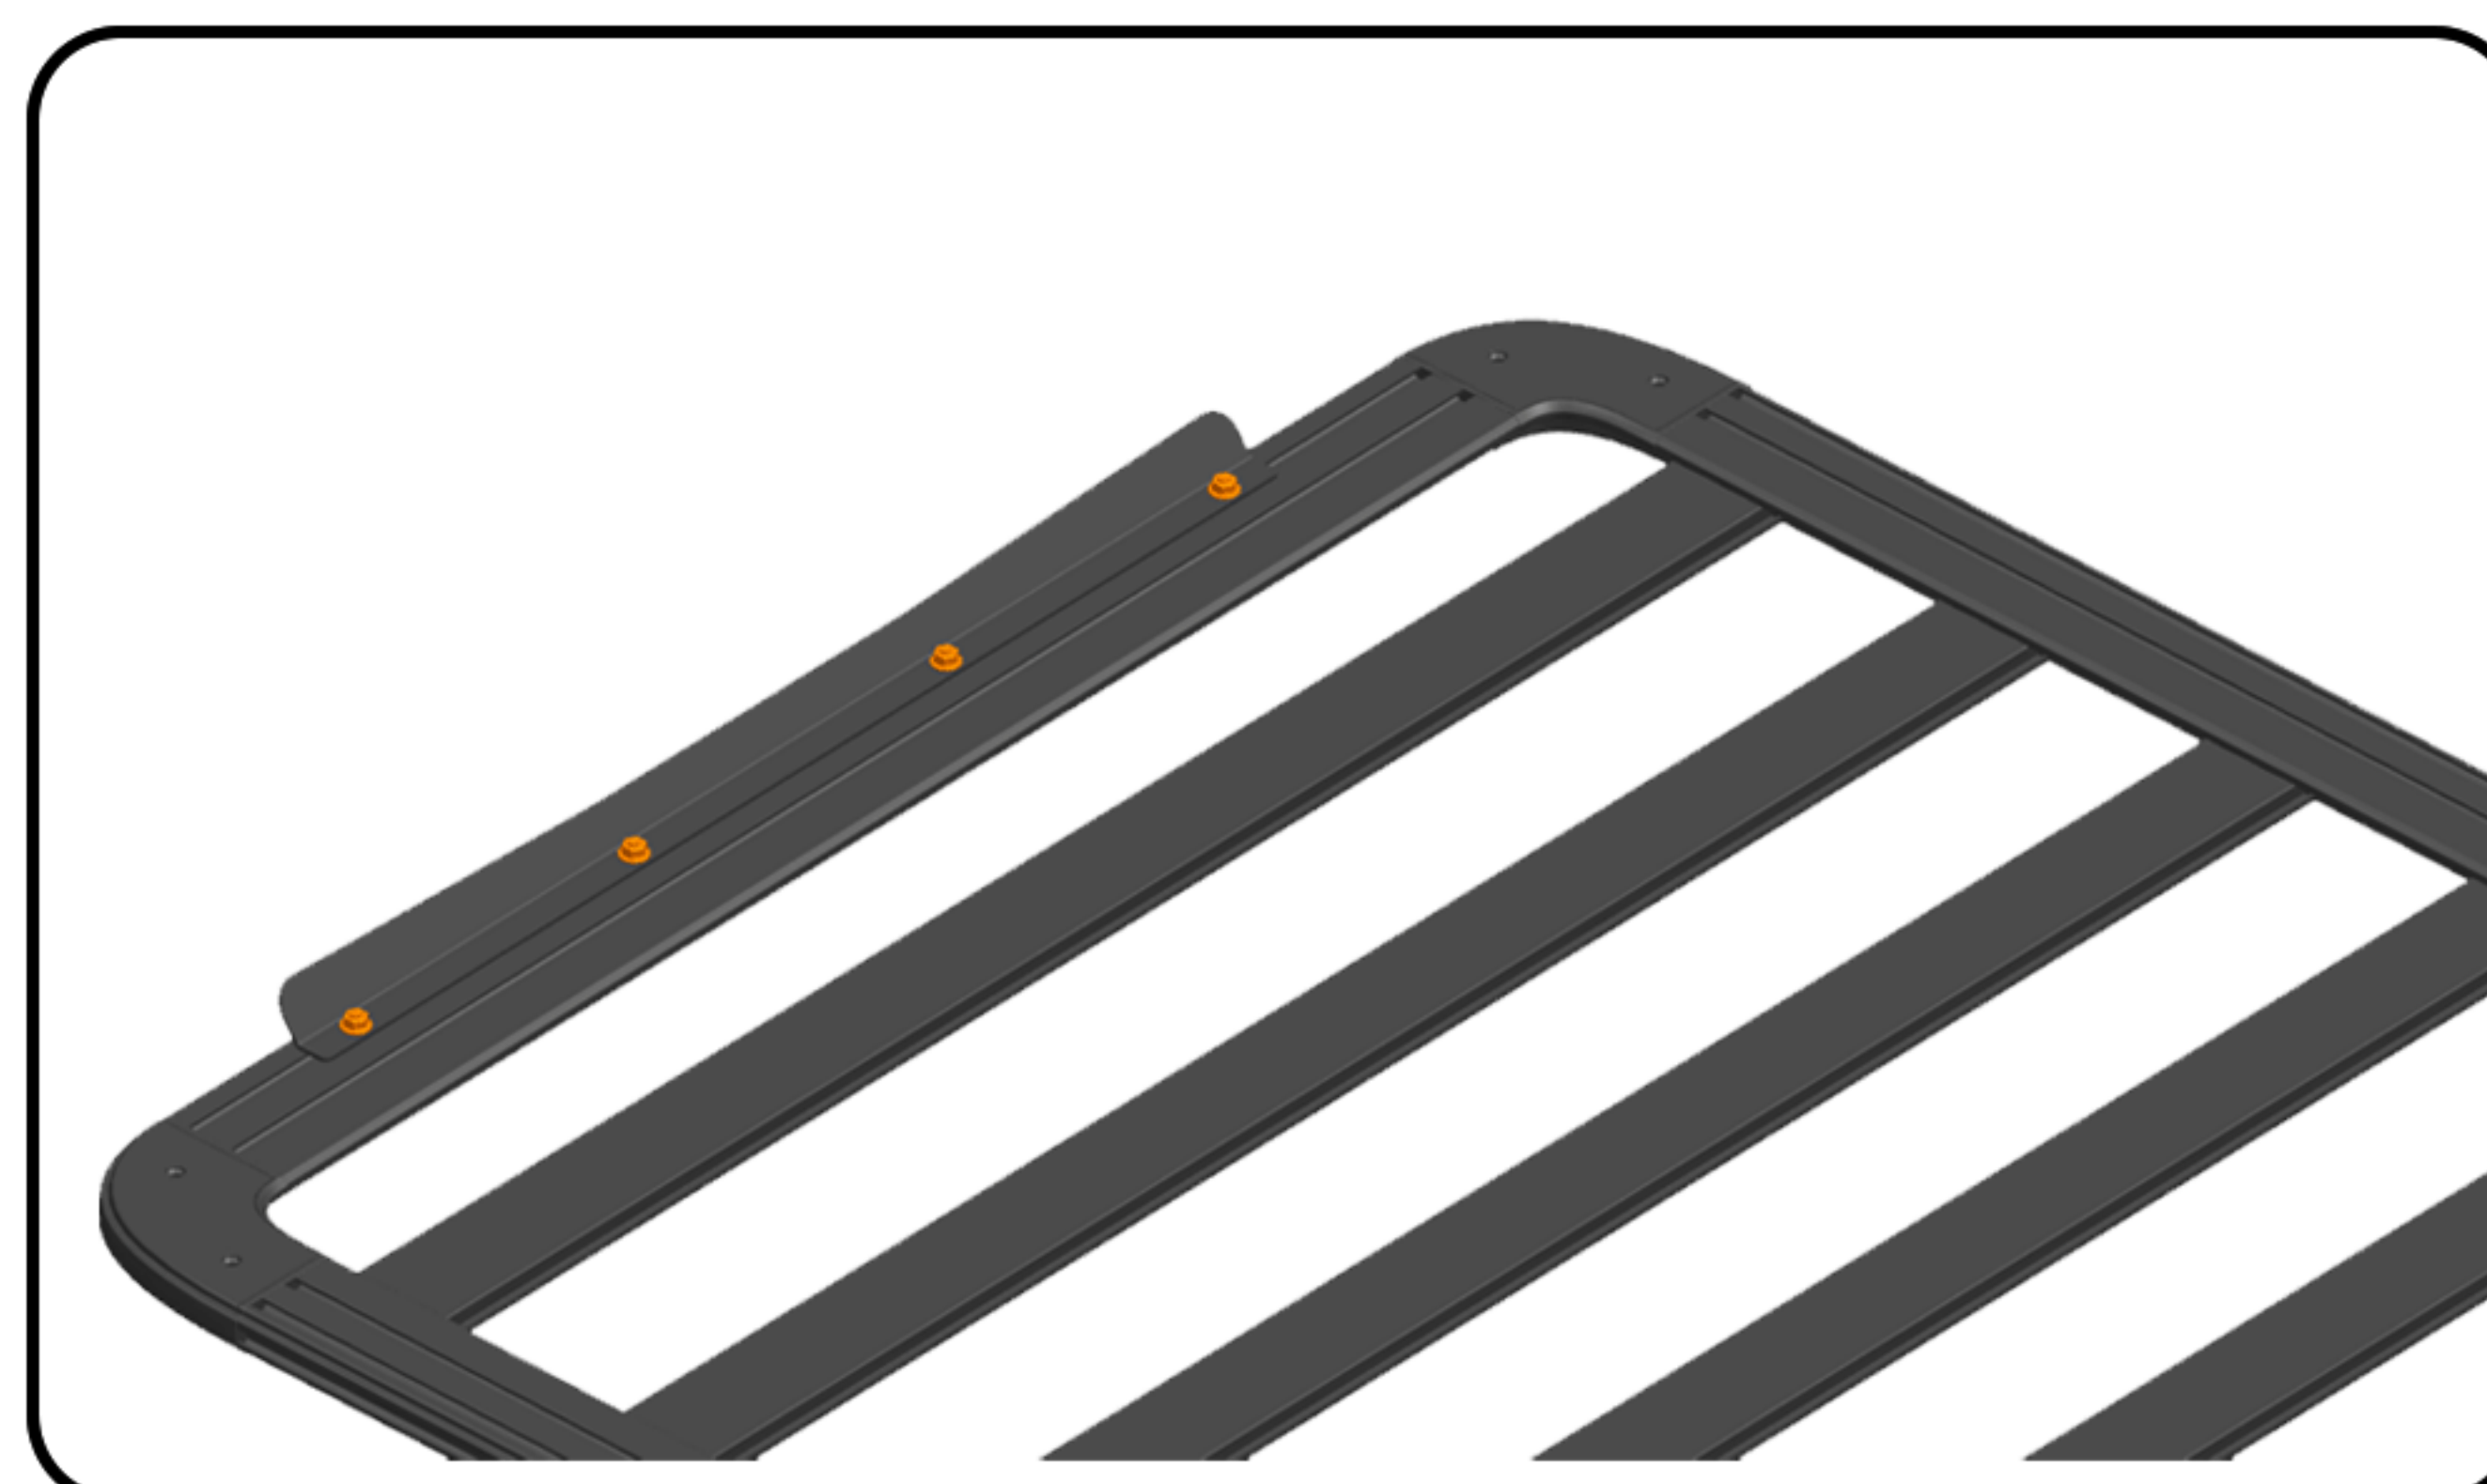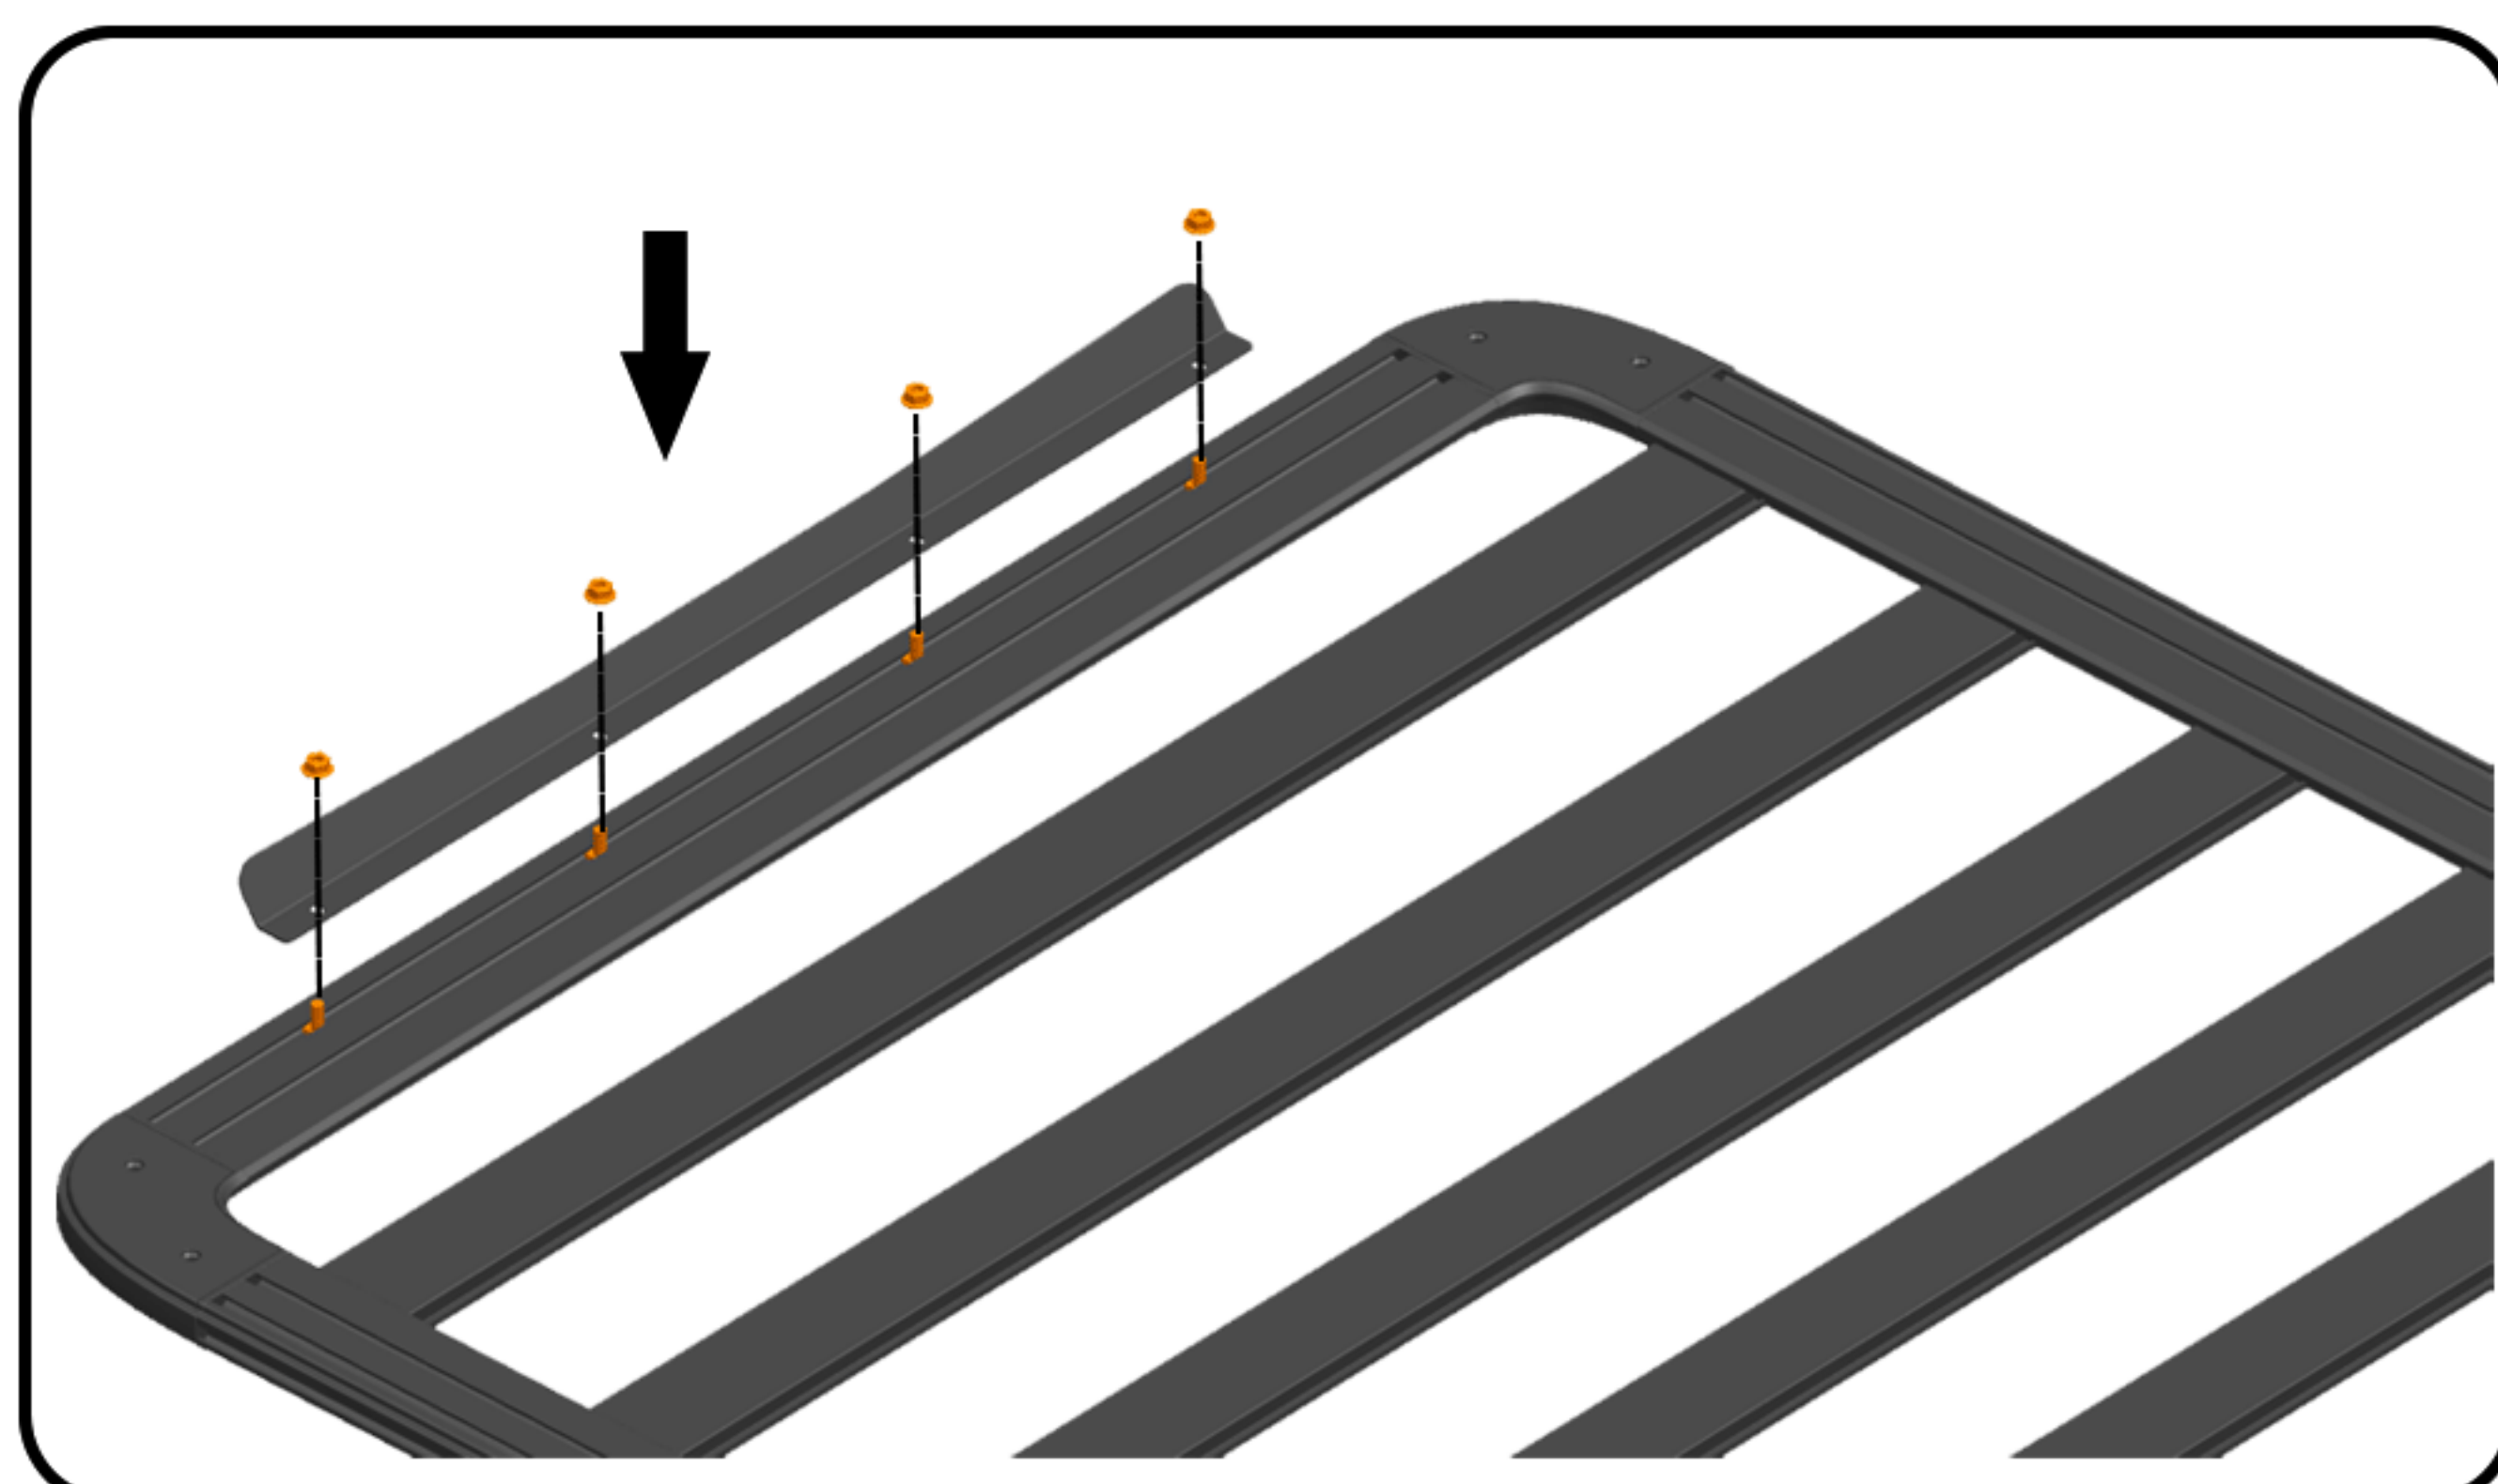

2 INSTALLATION STEPS

FIGURE 4.1

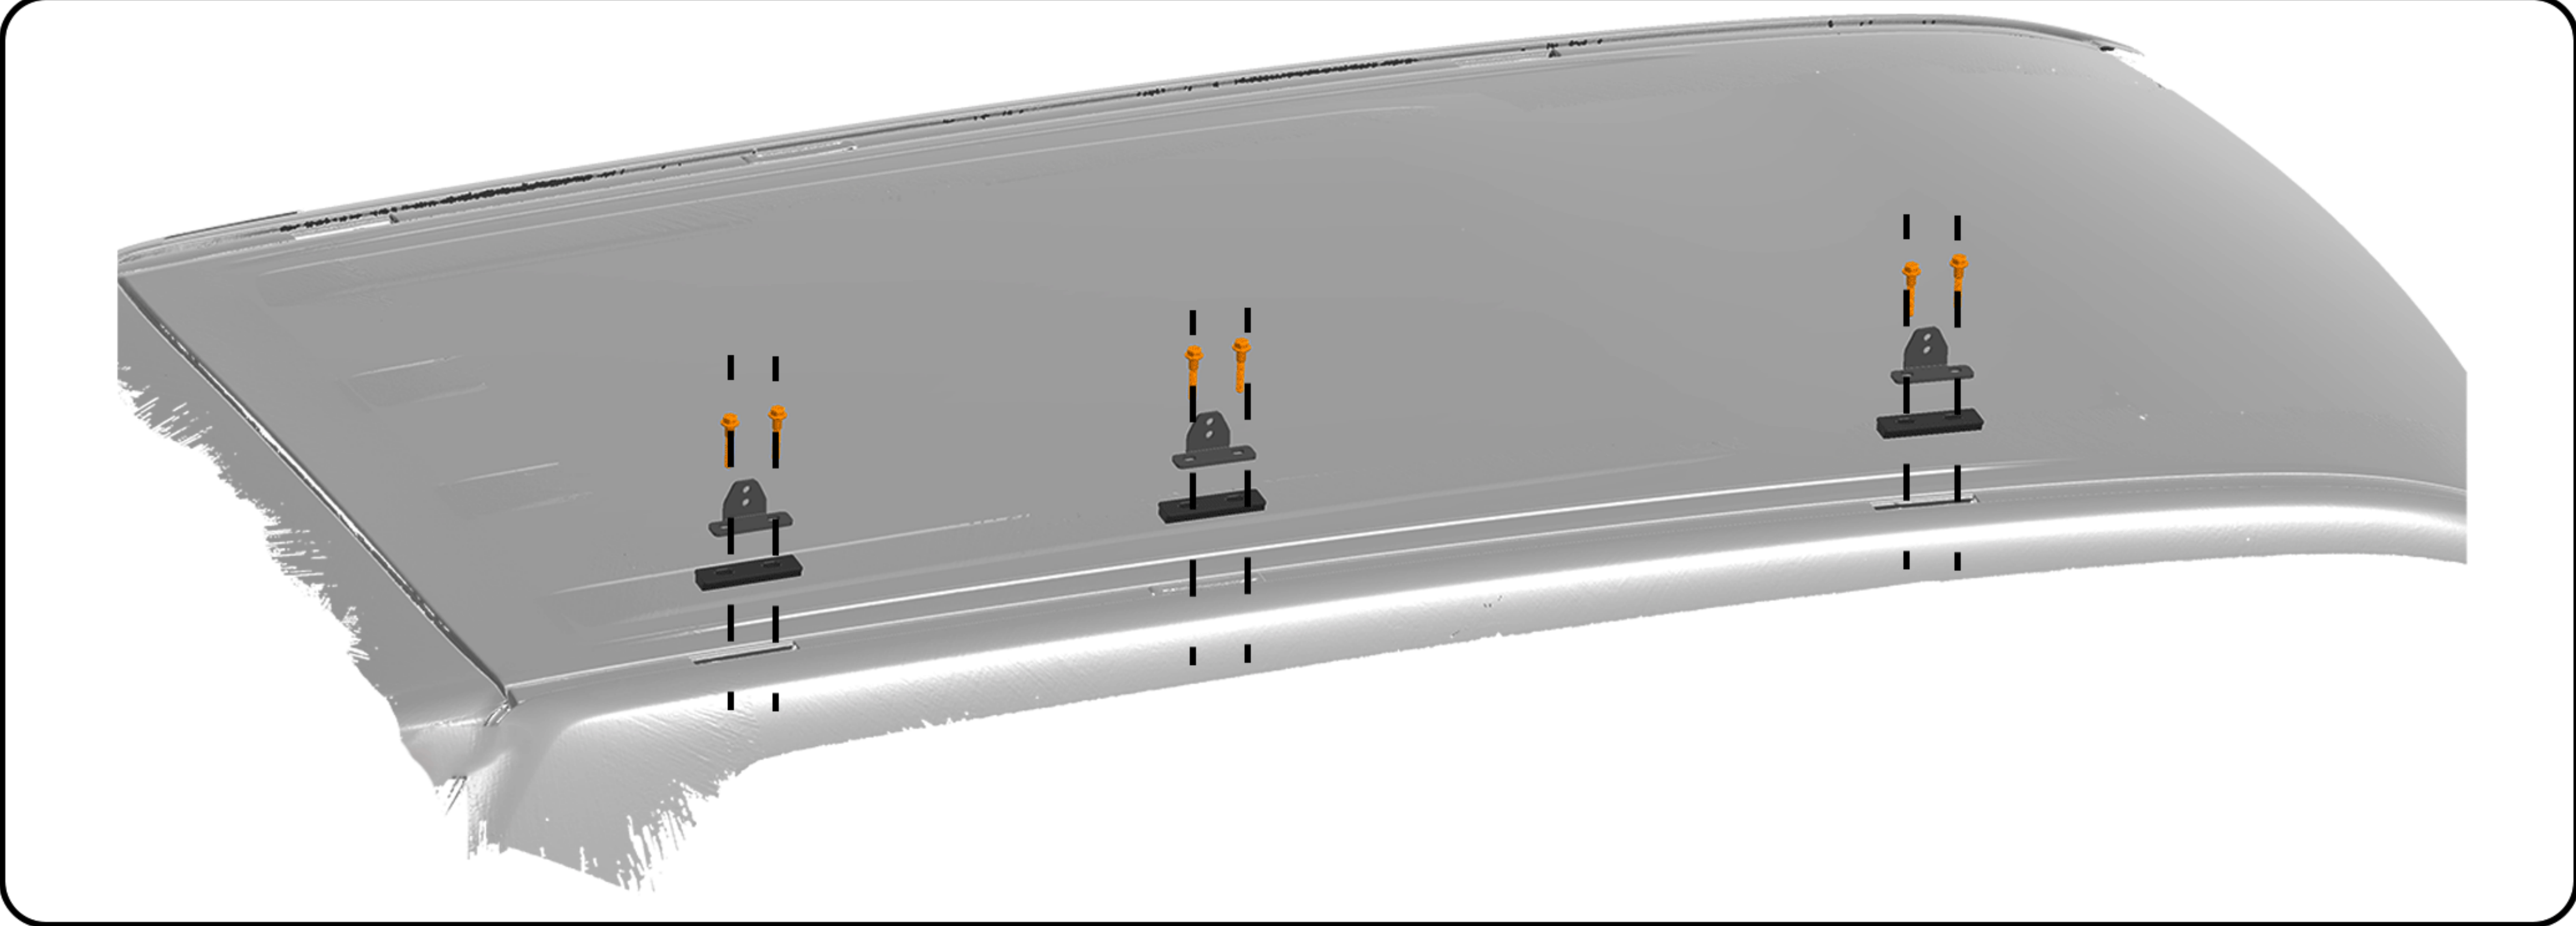


FIGURE 4.2

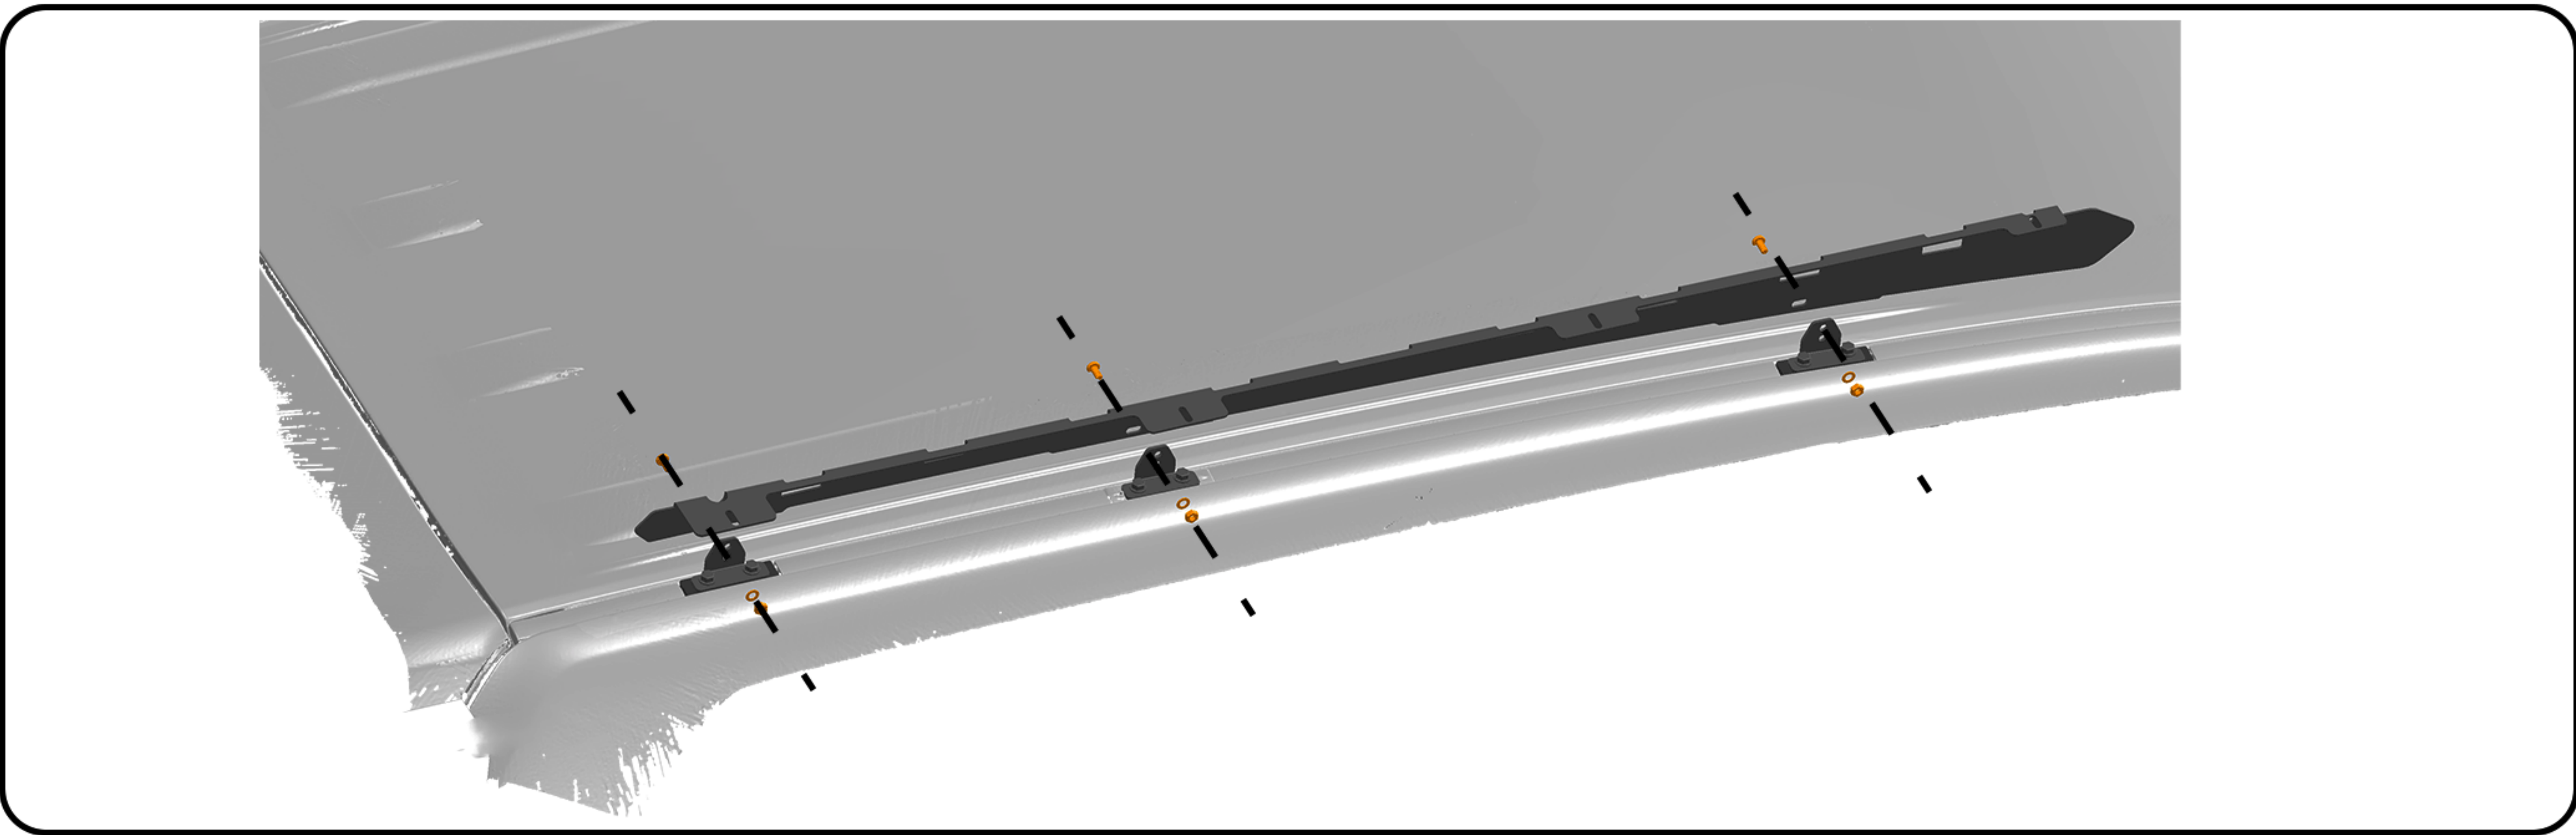


FIGURE 4.3

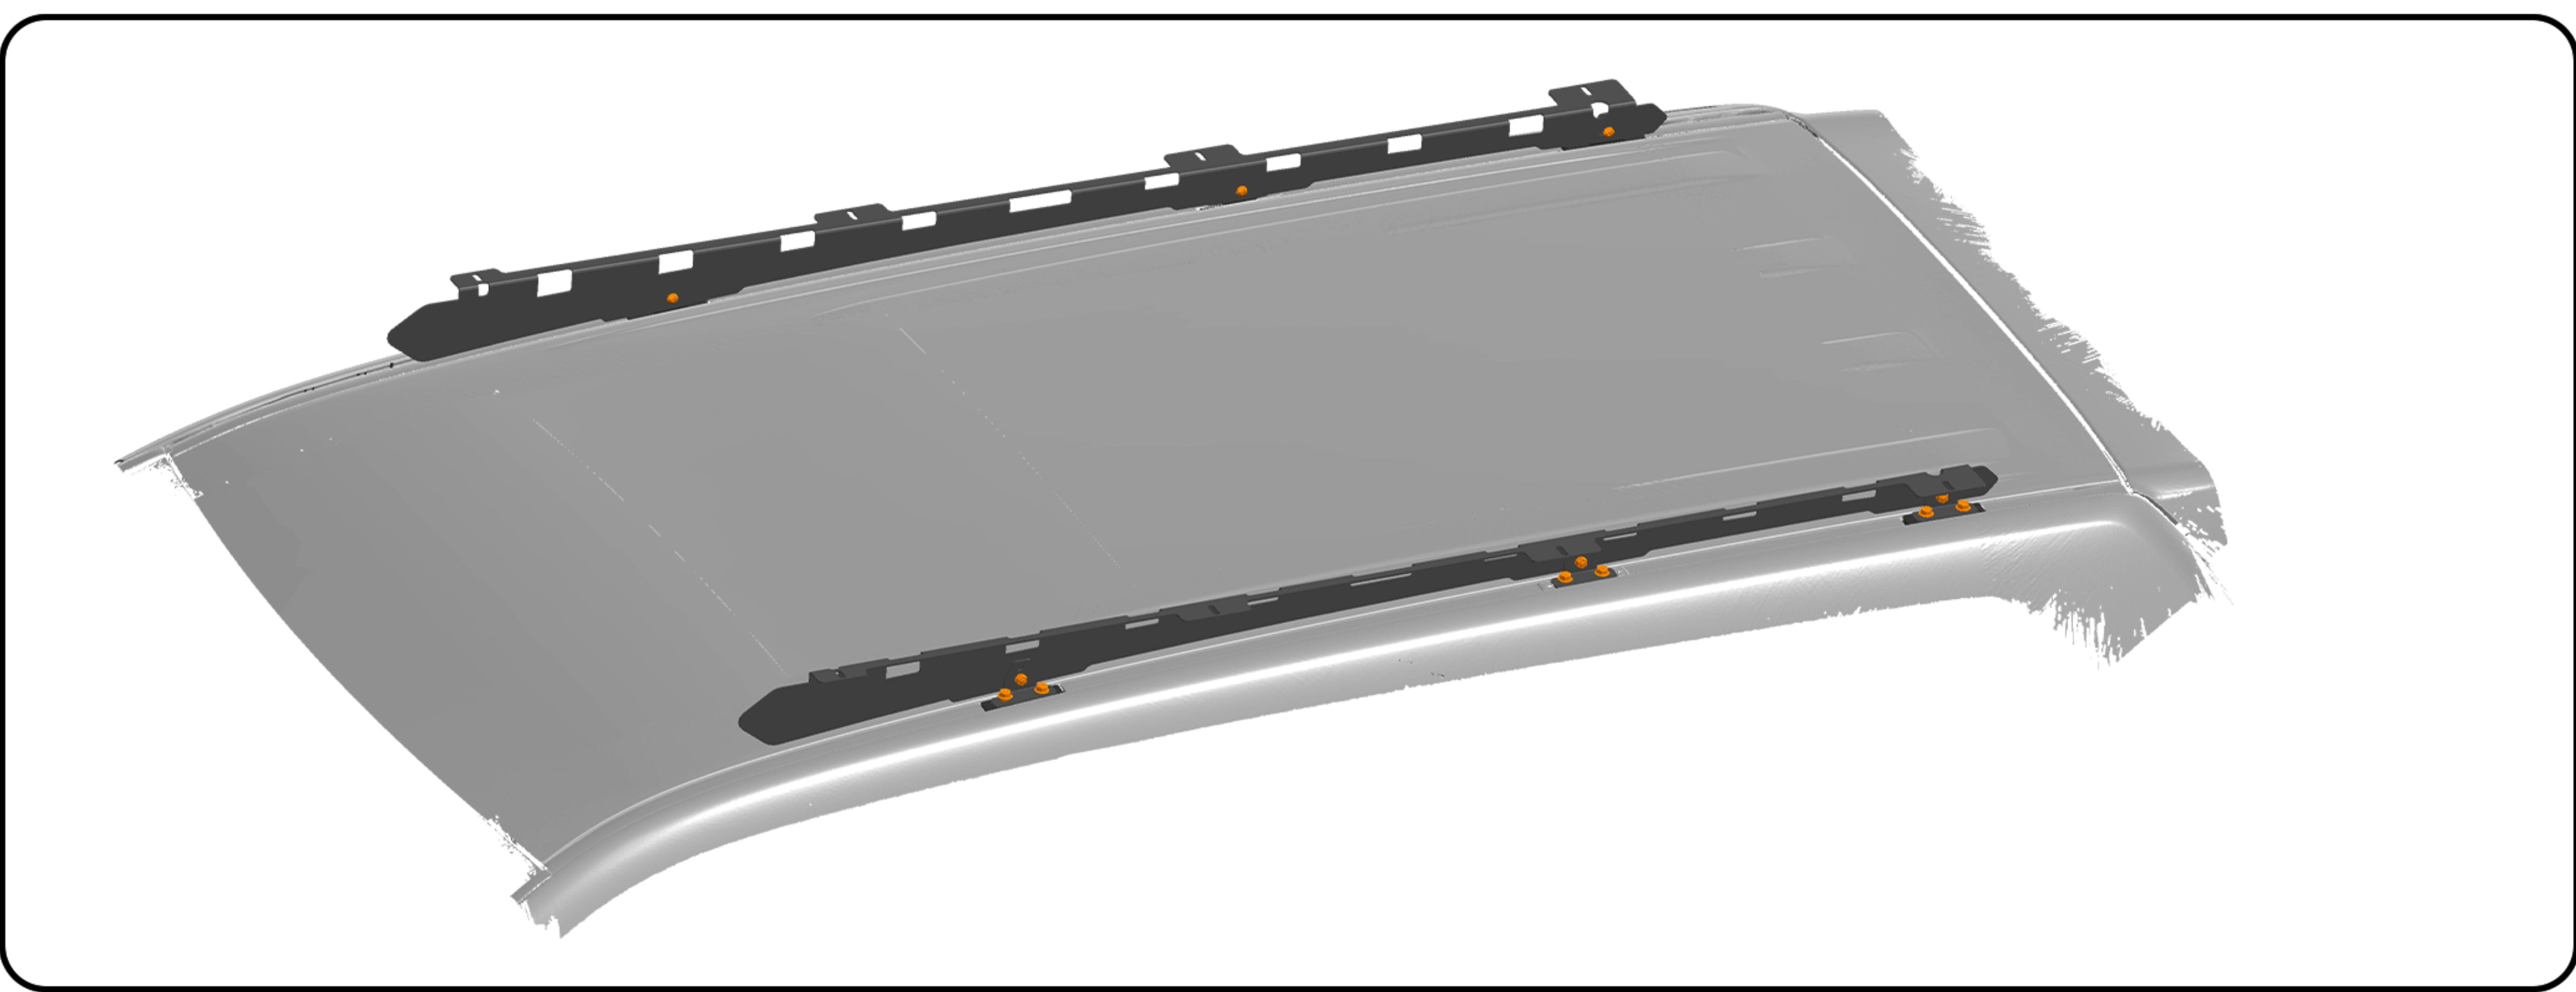


FIGURE 4.4

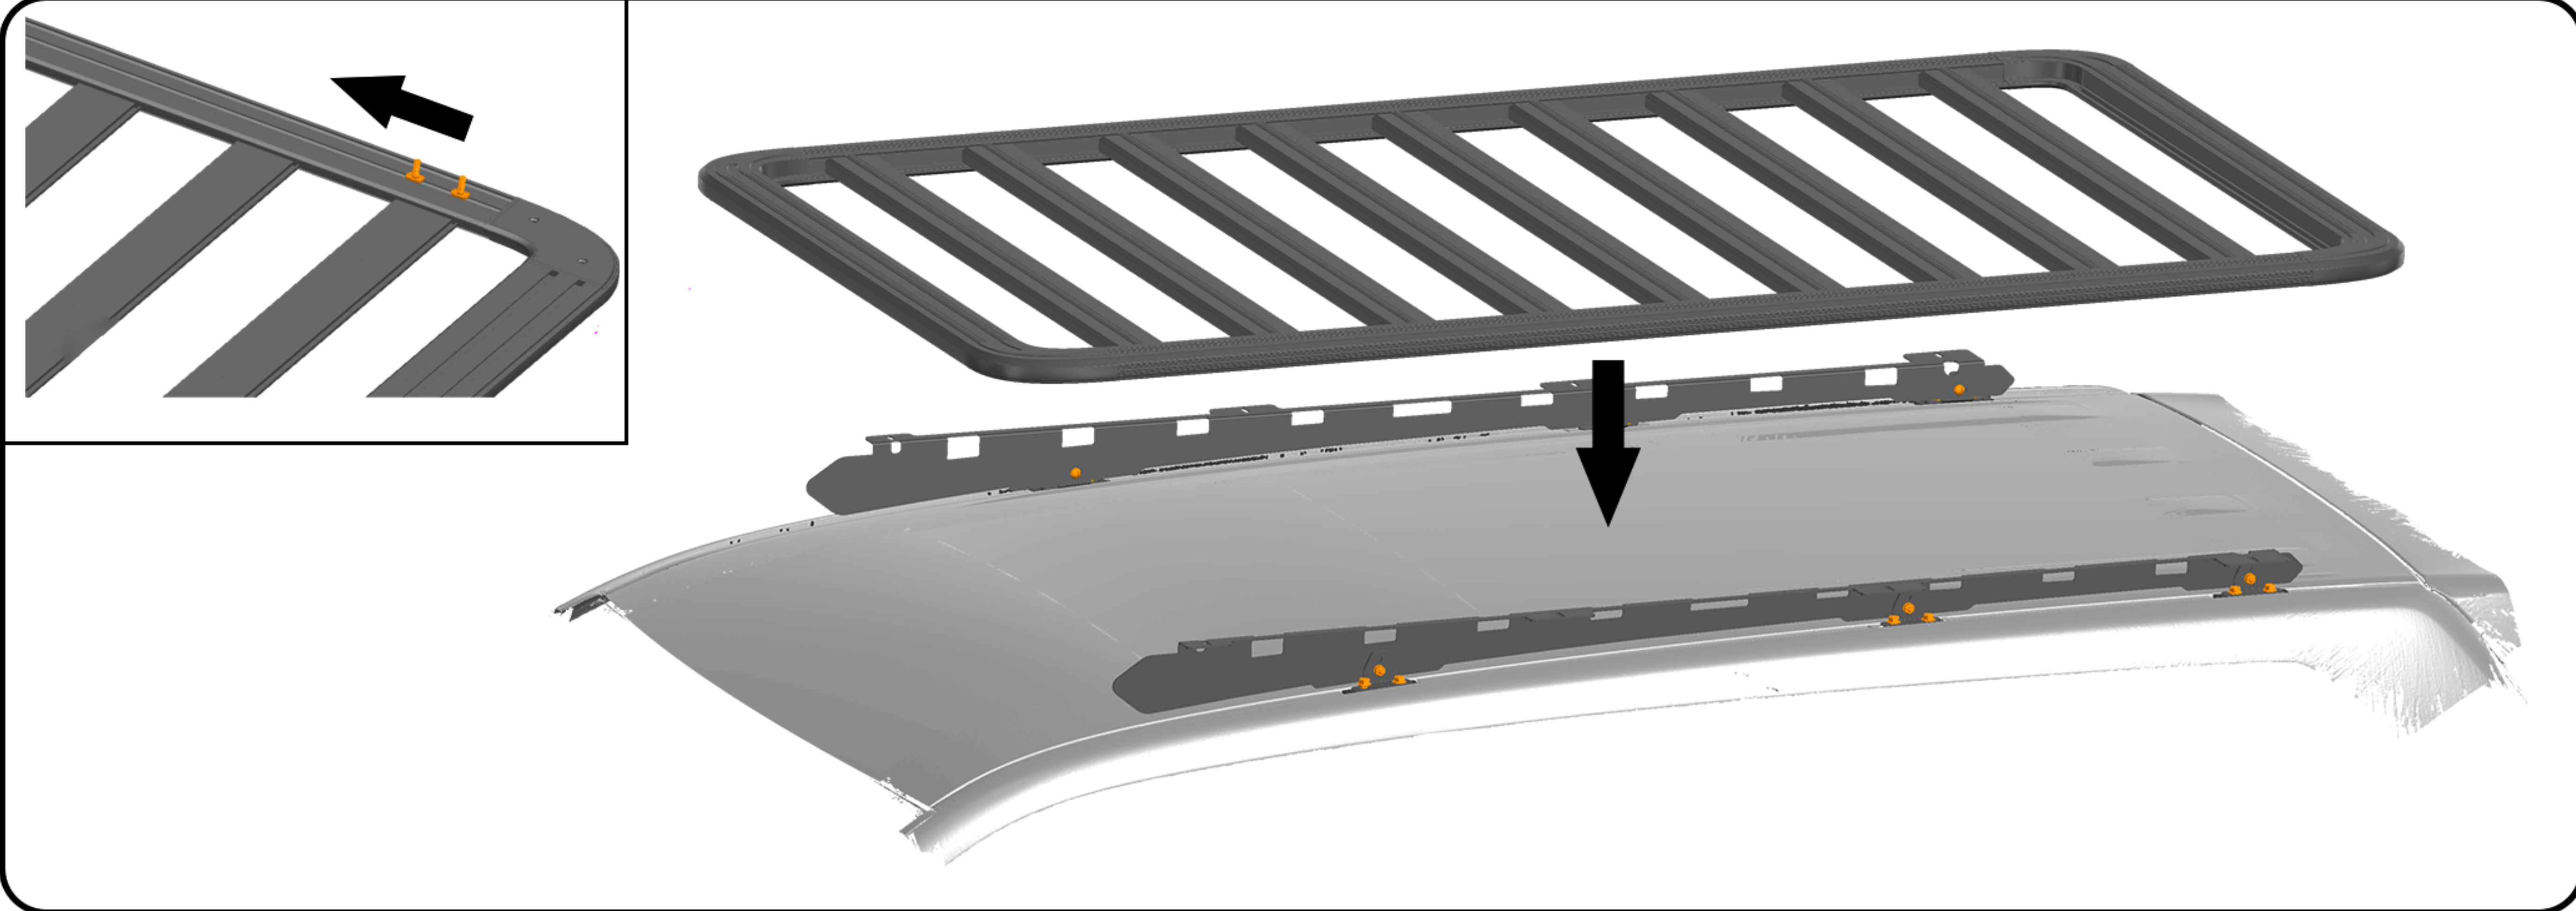


FIGURE 4.5

