

Warning


The following steps are to ensure water-proof performance.


Users or installers must refer to and complete them to ensure the water-proof performance of the product.

New Triton with Sailplane / New Trion Athele


STEP 1: Placing the 5mm EPDM foam seal on bulkhead.

Especially on the conner part, there is a big gap between OE roll bar bracket and tub . this will cause water leaking

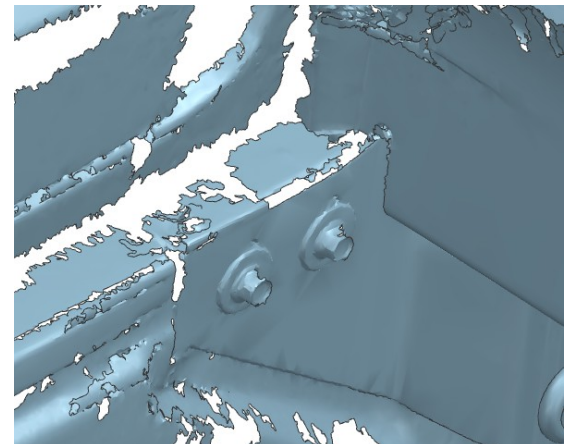

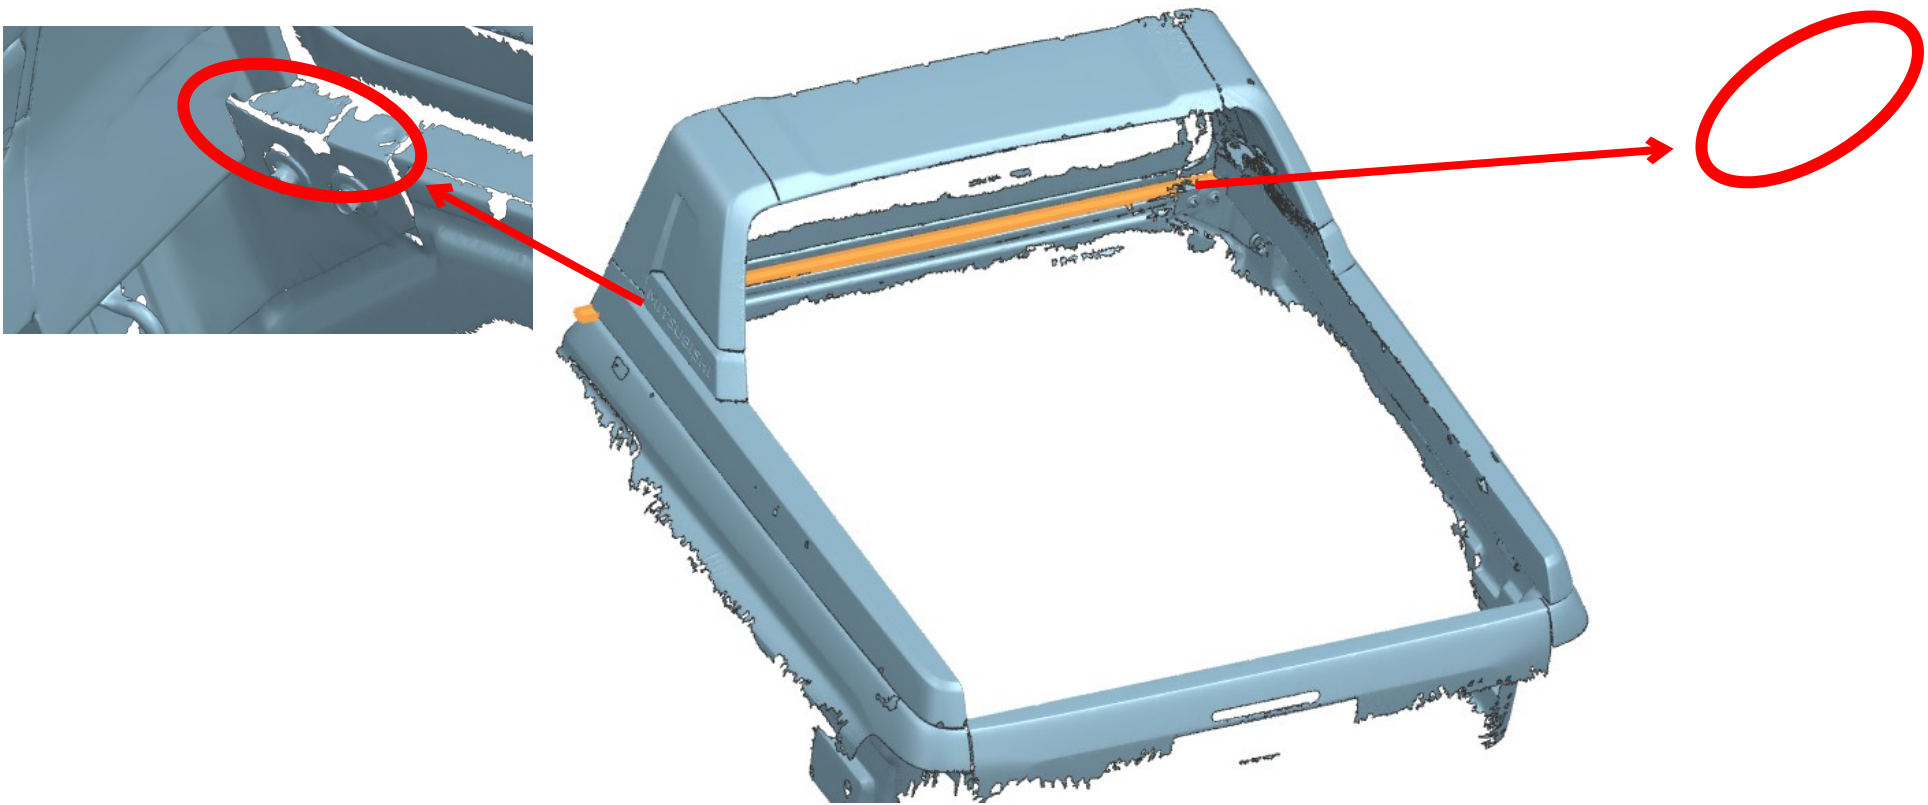


STEP 2: Trim the 10mm foam seal and stick on the front corner, as below picture shows. (LHS, assembly way is same on both sides)

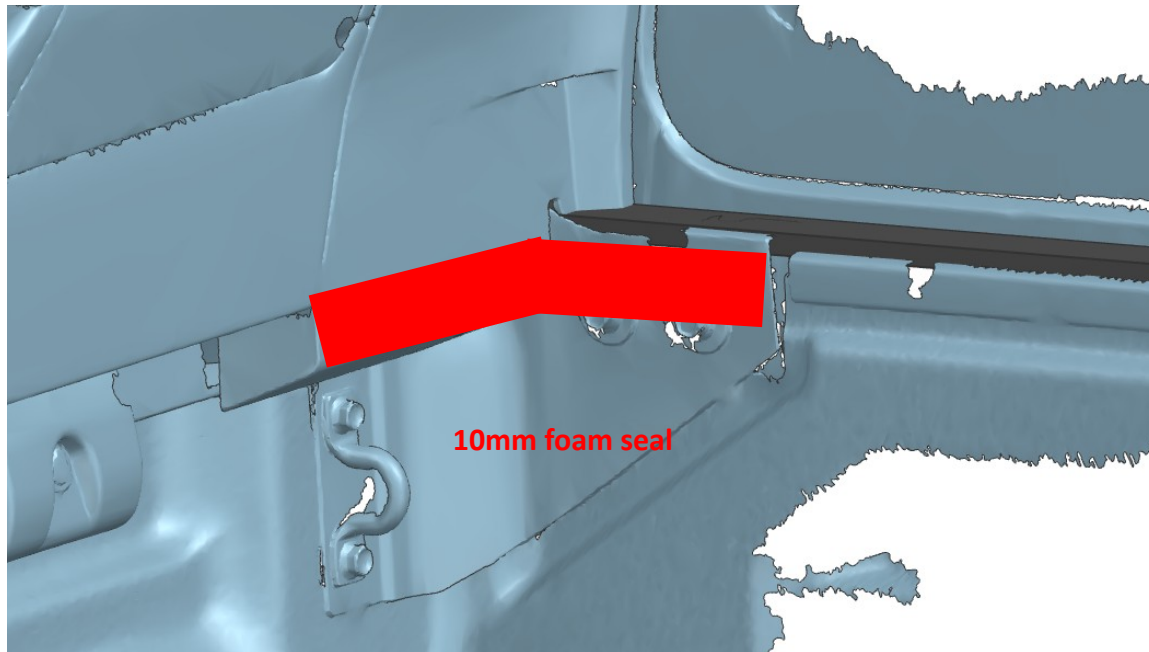

10mm foam seal

Bottom view

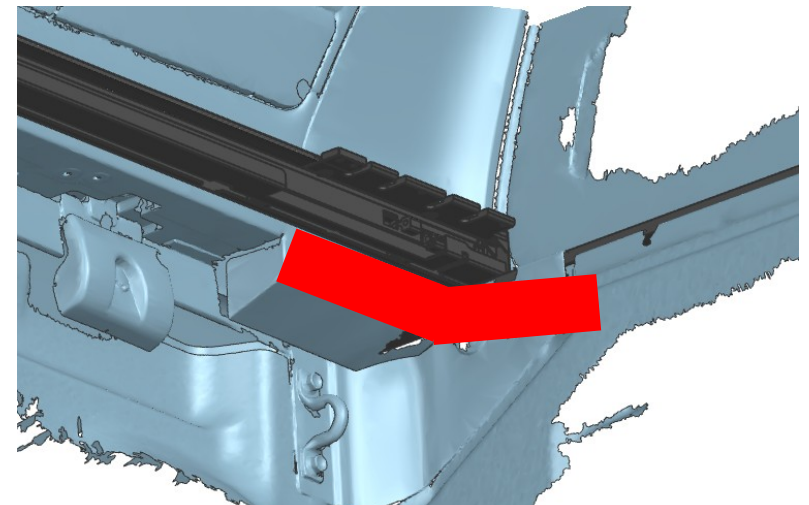

STEP 3: Place the roller shutter on tub, put some silicone on the corner.



Silicone



STEP 4: For better water resistant

4.1 Put on the protective film on sailplane and side rail, as below arrow shows.

4.2 Then put some silicone on the middle part for water resistant. To avoid water leaking between roller shutter side rail and sailplane.

4.3 Peel off the protective film, assembly way is same on both sides.

